



Quick Reference Guide

Explosion protection by WAROM



WAROM TECHNOLOGY INCORPORATED COMPANY



B rief introduction

Warom Technology Incorporated Company is the leading enterprise of Chinese explosion-proof industry with a registered capital of 337.598 million RMB, located in Jiading District of Shanghai, China. It manufactures the explosion-proof electric apparatus, which are used in factory, mine, marine, ocean platform, military and nuclear power, etc. As the standing unit of China Electrical Equipment Industry Association, the vice-director unit of China Explosion-proof Electric Association, the member unit of China Shipping Industry Association, the member unit of China Quality Association, Shanghai Foreign Trade Association and member unit of China Association of Lighting Industry, Warom has maintained the advantage as a professional leading company in China explosion-proof industry for 20 consecutive years.

Aiming to create a world brand, Warom Technology has organized a technical force with great strength; there are over 500 technical talents within the team. Warom Technology manufactures products that are representing the most advanced level in terms of quality and technical standards in China. The key technical indexes of explosion-proof performance, waterproof performance, and anti-corrosive performance of its exporting products are compliant to international requirements. The company has acquired intellectual property right of all its products, and has obtained Chinese and international patent certificates. And the Warom trademark has been registered in more than 30 countries and regions.

The industrial park established by Warom Technology in Shanghai is the largest explosion-proof apparatus production base in China, and it is also one of the top five largest explosion-proof mass production bases in the world. It facilitates with advanced equipments with the best build-in technical process; it has a well structured quality assurance system, and it is managed by international standards, quality guarantee system and international management system.

- ★ Warom Shanghai Industrial Park is currently the largest explosion-proof electrical equipments manufacturing base in the industry with the most advanced facilities and the best equipment condition and the processes and equipments have achieved full automation or semi. The park covers an area of over 150,000 square meters with modern workshop of 220,000 square meters and more than 2,000 workers.
- ★ Warom has established the only one CNAS certified laboratory in the explosion-proof industry with a large number of advanced testing and control equipments from materials to performance, electricity to optics, and electrical safety to electromagnetic safety, etc.
- ★ ISO9001 Quality Management System, ISO10012 Measurement Management System, ISO14001 Environmental Management System and OHSAS 18001 Occupational Health and Safety Management System certified; and the products have been obtained ATEX and IECEx certificates from internationally renowned laboratories such as PTB of Germany, LCIE of France, Nemko and DNV of Norway, Eurofins of Italy, and other certificates like UL and CU-TR of Russia, Belarus and Kazakhstan, PESO of India and INMETRO of Brazil etc..

Warom's products have been widely used in various industries including Oil and Gas, Chemical, Aerospace, Coal, Electric Power, Railway, Metallurgy, Marine, Security, Fire Protection, Irrigation, City Planning, Telecom and Diving Rescue. The products are sold to 31 provinces in China and to over 50 countries in the world. The Company has become a reliable supplier and cooperative partner to many renowned petrochemical companies. As one of the two explosion-proof equipment manufacturers in IECEx Mark Committees, Warom has gained strong brand recognition with various awards including "Famous-brand Product", "Famous Trademark", "AAA Credit Rating Company", and "The Credible Enterprise" etc..

Warom is walking forward the world! Warom is on the way of world explosion-proof brand!

"Let Warom's Product Speak for itself!"

"Let Product Ensure User's Safety!"



EXPLOSION-PROOF LIGHT FITTINGS FOR FLUORESCENT LAMP



BAY51-Q

- ◆ Ex e enclosure with explosion-proof components inside.
- ◆ Safety interlock between enclosure and diffuser, switches off on opening.
- ◆ Emergency unit with protections against overcharge and over-discharge.
- ◆ End of lamp life (EOL) rectification effect protection.

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex d e q IIC T4 Gb
- Ex t IIIC T80°C Db IP66
- Europe (ATEX)
- Ex II 2 G Ex d e q IIC T4 Gb
- Ex II 2 D Ex t IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR; INMETRO

Material

Enclosure: GRP; Diffuser: Polycarbonate

Lamp

Lamp specification: T8 tube

Lamp power (W):

36W x 2	18W x 2
36W x 1	18W x 1

Degree of protection: IP66

EXPLOSION-PROOF LIGHT FITTINGS WITH LED TUBES



BAY51-Q LED

- ◆ Ex e enclosure with explosion-proof components inside.
- ◆ Built-in LED driver, wide voltage input, CC-CV (constant current-constant voltage) output, power factor ≥0.95.
- ◆ Emergency unit with protections against overcharge and over-discharge.

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex db eb IIC T6 Gb
- Ex db eb q IIC T5 or T6 Gb
- Ex tb IIIC T80°C Db IP66
- Europe (ATEX)
- Ex II 2 G Ex db eb IIC T6 Gb
- Ex II 2 G Ex db eb q IIC T5 or T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: GRP; Diffuser: Polycarbonate

Lamp

Lamp specification: LED module

Lamp power (W):

9W×1, 18W×1, 9W×2, 18W×2
(LED lamp and driving power are integrated type)

14W x 1, 28W x 1, 14W x 2, 28W x 2
(LED lamp and driving power are split type)

Degree of protection: IP66

EXPLOSION-PROOF LIGHT FITTINGS FOR FLUORESCENT LAMP



BAY51

- ◆ Built-in electronic ballast, wide voltage input, rapid starting, stable performance, power factor ≥0.95.
- ◆ Built-in LED driver, wide voltage input, CC-CV (constant current-constant voltage) output, power factor ≥0.95.
- ◆ End of lamp life (EOL) rectification effect protection.

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex d IIC T6 Gb
- Ex t IIIC T80°C Db IP66
- Europe (ATEX)
- Ex II 2 G Ex d IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Gb IP66

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy

Glass tube: Toughened glass

Lamp

Lamp specification: T8 tube/LED module

Lamp power (W):

T8: 18Wx1, 18Wx2, 36Wx1, 36Wx2, 58Wx1, 58Wx2

LED: 9Wx1, 9Wx2, 18Wx1, 18Wx2, 28Wx1, 28Wx2

Degree of protection: IP66



EXPLOSION-PROOF LIGHT FITTINGS FOR FLUORESCENT LAMP



BAY51-D

- ◆ Built-in electronic ballast, wide voltage input, rapid starting, stable performance, power factor ≥0.95.
- ◆ Built-in LED driver, wide voltage input, CC-CV (constant current - constant voltage) output, power factor ≥0.95.
- ◆ End of lamp life (EOL) rectification effect protection.
- ◆ Emergency functions are available on request.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db IIB T6 Gb
Ex db IIB+H₂ T6 Gb
Ex tb IIIC T80°C Db IP66

Europe (ATEX)

Ex II 2 G Ex db IIB T6 Gb
Ex II 2 G Ex db IIB+H₂ T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Glass tube: Toughened glass

Lamp

Lamp specification: T8 fluorescent lamp / T5 fluorescent lamp / LED module
Lamp power (W):

T8: 18Wx2, 36Wx2, 58Wx2

T5: 14Wx2, 28Wx2, 35Wx2

LED: 9Wx2, 18Wx2, 28Wx2

Degree of protection: IP66

EXPLOSION-PROOF LIGHT FITTINGS



HRY92-LED

- ◆ Built-in LED driver, wide voltage input, CC-CV (constant current - constant voltage) output, power factor ≥0.95.
- ◆ End of lamp life (EOL) rectification effect protection.
- ◆ Emergency functions are available on request.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)(applied for)
Ex db IIC T6 Gb
Ex tb IIIC T80°C Db IP66

Europe (ATEX)(applied for)

Ex II 2 G Ex db IIC T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Glass tube: Toughened glass

Lamp

Lamp specification: LED module

Lamp power (W): 20W, 40W, 60W

Degree of protection: IP66

EXPLOSION-PROOF LIGHT FITTINGS FOR FLUORESCENT LAMP



HRY52

- ◆ T8 Fluorescent Lamps:
Built-in electromagnetic ballast (Electronic ballast is optional, please specify when ordering).
- ◆ LED lamps:
Built-in LED driver, wide voltage input, CC-CV(constant current-constant voltage) output, power factor ≥0.95.

Zones 1&2; 21&22

Explosion protection

CNEC (China)
Ex db IIC Gb
Ex tb IIIC T80°C Db

Certificates: PCEC (China)

Material

Enclosure: Copper-free aluminium alloy
Glass tube: Toughened glass

Lamp

Lamp specification:

T8 fluorescent lamp / LED module

Lamp power (W):

T8: 18Wx1, 36Wx1, 18Wx2, 36Wx2

LED: 9Wx1, 18Wx1, 9Wx2, 18Wx2

Degree of protection: IP66

EXPLOSION-PROOF HIGH EFFICIENCY ENERGY-SAVING LED LAMP



HRY97

- ◆ Enclosure in Copper-free Aluminium Alloy, powder coated surface, yellow (RAL1021).
- ◆ Built-in LED driver, wide voltage input, CC-CV (constant current - constant voltage) output, power factor ≥ 0.95 .
- ◆ End of lamp life (EOL) rectification effect protection.
- ◆ The 40W lamps can be equipped with emergency device. The emergency time is divided into 90min and 180min options. No special instructions is 90min.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)(applied for)
Ex db eb mb IIC T6 Gb
Ex tb IIIC T80°C Db
Europe (ATEX)(applied for)

Ex II 2 G Ex db eb mb IIC T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free Aluminium Alloy, powder coated surface, yellow (RAL1021)

Diffuser: Polycarbonate, stands 4J impact

Lamp

Lamp specification: LED module
(supplied with the light fittings)

Lamp power (W): 20W, 40W, 60W

Degree of protection: IP66

EXPLOSION-PROOF LIGHT FITTINGS FOR FLUORESCENT LAMP



BnY81

- ◆ Built-in electronic ballast, wide voltage input, rapid starting, stable performance, power factor ≥ 0.95 .
- ◆ LED light fittings:
Built-in LED driver, wide voltage input, CC-CV (constant current-constant voltage) output, power factor ≥ 0.95 .
- ◆ Only dual tube light fittings have emergency lighting function.
- ◆ End of lamp life (EOL) rectification effect protection.

Zones 2; 21&22

Explosion protection

Global (IECEx)
Ex nA IIC T4 Gc
Ex t IIIC T80°C Db IP66
Europe (ATEX)

Ex II 3 G Ex nA IIC T4 Gc

Ex II 2 D Ex t IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Polycarbonate; Diffuser: Polycarbonate

Lamp

Lamp specification: T8 tube/LED module

Lamp power (W):

T8: 18Wx1, 18Wx2, 36Wx1, 36Wx2

LED: 9Wx1, 9Wx2, 18Wx1, 18Wx2, 28Wx1, 28Wx2

Degree of protection: IP66

EXPLOSION-PROOF LIGHT FITTINGS FOR FLUORESCENT LAMP



HRY51-G/C

- ◆ Built-in electronic ballast, power factor ≥ 0.95 .
- ◆ LED driver, wide voltage input, CC-CV (constant current-constant voltage) output, power factor ≥ 0.95 .
- ◆ End of lamp life (EOL) rectification effect protection.
- ◆ Emergency functions is available on request.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db eb IIC T□ Gb
Ex db eb q IIC T□ Gb
Ex tb IIIC T80°C Db IP66/IP67
Europe (ATEX)

Ex II 2 G Ex db eb IIC T□ Gb

Ex II 2 G Ex db eb q IIC T□ Gb

Ex II 2 D Ex tb IIIC T80°C Db IP66/IP67

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Stainless steel

Diffuser: Clear polycarbonate

Lamp

Lamp specification: LED module

Lamp power (W):

9Wx2, 18Wx2, 14Wx2, 28Wx2

Degree of protection: IP66


EXPLOSION-PROOF FLUORESCENT LAMP

HRY81-QT

- ◆ Built-in electronic ballast, power factor ≥0.95.
- ◆ Special-made mounting bracket, the illumination angle can be adjusted on request.
- ◆ Emergency function is available on request.
- ◆ End of lamp life (EOL) rectification effect protection.

Zones 1&2; 21&22

Explosion protection

PCEC
Ex db eb q IIC T4 Gb
Ex tb IIIC T80°C Db

Certificates: IECEx; ATEX

Material

Enclosure: Copper-free aluminium alloy
Diffuser: Polycarbonate

Lamp

Lamp specification: T8 tube
Lamp power (W): 18Wx2, 36Wx2
Emergency power (W): 18Wx30%, 36Wx30%

Degree of protection: IP66

EXPLOSION-PROOF LED LIGHTINGS

HRD91-LED

- ◆ Isolated LED lamp compartment, CC-CV (constant current-constant voltage) power controller compartment and terminal compartment; Wind-convection heat dissipation structure;
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db op is IIC T6/T5 Gb
Ex tb op is IIIC T80°C/T95°C Db
Europe (ATEX)

Ex II 2 G Ex db op is IIC T6/T5 Gb

Ex II 2 D Ex tb op is IIIC T80°C/T95°C Db

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Transparent cover: Toughened glass

Lamp

Lamp specification: LED
Lamp power (W): 30W, 50W, 70W, 100W

Degree of protection: IP66

EXPLOSION-PROOF LED LIGHTINGS

HRD95

- ◆ Isolated LED lamp compartment, CC-CV (constant current -constant voltage) power controller compartment and terminal compartment; Wind-convection heat dissipation structure.
- ◆ International brand white light LED, reasonable arrangement of multi LED, high lighting efficiency and long service life.
- ◆ Two types of light distribution: spotlight and floodlight, which can be selected on request.
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db op is IIC T□ Gb
Ex tb op is IIIC T□ Db IP66
Europe (ATEX)

Ex II 2 G Ex db op is IIC T□ Gb

Ex II 2 D Ex tb op is IIIC T□ Db IP66

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Glass cover: Toughened glass

Lamp

Lamp specification: LED module, Multiple LED
Lamp power (W):

60W, 90W, 120W, 160W, 200W, 240W

Degree of protection: IP66

EXPLOSION-PROOF LED LIGHTINGS



HRD96

- ◆ Isolated LED lamp compartment, CC-CV (constant current -constant voltage) power controller compartment and terminal compartment; Wind-convection heat dissipation structure.
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)(applied for)

Ex db IIC T6 Gb

Ex tb IIIC T80°C Db IP66

Europe (ATEX)(applied for)

Ex II 2 G Ex db IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX

Material

Enclosure: Copper-free aluminium alloy

Transparent cover: Toughened glass

Lamp

Lamp specification: LED module, Multiple LED

Lamp power (W): 30W, 60W, 120W

Degree of protection: IP66

EXPLOSION-PROOF LED LIGHTINGS



HRD97

- ◆ Isolated LED lamp compartment, CC-CV (constant current -constant voltage) power controller compartment and terminal compartment; Wind-convection heat dissipation structure.
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db IIC T6 Gb

Ex tb IIIC T80°C Db

Europe (ATEX)(applied for)

Ex II 2 G Ex db IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy

Transparent cover: Toughened glass

Lamp

Lamp specification: LED module, Multiple LED

Lamp power (W): 10W, 20W

Degree of protection: IP66

EXPLOSION-PROOF EMERGENCY LED LIGHT FITTINGS



HRJ

- ◆ International brand white light LED, reasonable arrangement of multi LED, high lighting efficiency and long service life.
- ◆ Emergency device with battery pack, charging automatically; when power supply is cut off, the emergency device starts to work; with overcharge and overdischarge protection.
- ◆ Toughened glass cover resistant to temperature changes.
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db op is IIC T6 Gb

Ex tb op is IIIC T80°C Db

Europe (ATEX)

Ex II 2 G Ex db op is IIC T6 Gb

Ex II 2 D Ex tb op is IIIC T80°C Db

Certificates:

IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy

Glass cover: Toughened glass

Lamp

Lamp specification: LED module, Multiple LED

Lamp power (W): 30W, 60W

Emergency power (W): 20W, 40W

Degree of protection: IP66



EXPLOSION-PROOF LED LIGHTINGS



BDD95

- ◆ New COB technology, large power and white light LED array, power of single LED can reach 20W~40W, high lighting efficiency, long service life.
- ◆ Two types of light distribution: spotlight and floodlight, which can be selected on request.
- ◆ 160 type lightings adopt light fitting integrated two lamps, the power of whole machine is of 2x120W, 2x160W
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Zones 1&2; 21&22

Class I, Division 2, Groups A, B, C, D

Explosion protection

Global (IECEx)
Ex db eb op is IIC T₂ Gb
Ex tb op is IIIC T₂ Db
Europe (ATEX)

Ex II 2 G Ex db eb op is IIC T₂ Gb
Ex II 2 D Ex op is tb IIIC T₂ Db

Certificates:

IECEx; ATEX; UL; CU-TR; INMETRO

Material

Enclosure: Copper-free aluminium alloy
Glass cover: Toughened glass

Lamp

Lamp specification: Integrated LED, Multiple LED
Lamp power (W): 60W, 90W, 120W, 160W

Degree of protection: IP66

EXPLOSION-PROOF LED FLOODLIGHTS



BAT86

- ◆ Isolated LED lamp compartment, CC-CV (constant current-constant voltage) power controller compartment and terminal compartment; Wind-convection heat dissipation structure.
- ◆ Standard product is of floodlight effect, lens of 40° and 60° can be provided on request to realize spotlight effect.
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db IIB+H₂ T₂ Gb
Ex tb IIIC T₂ Db
Europe (ATEX)

Ex II 2 G Ex db IIB+H₂ T₂ Gb
Ex II 2 D Ex tb IIIC T₂ Db

Certificates: IECEx; ATEX; CU-TR; INMETRO

Material

Enclosure: Copper-free aluminium alloy
Glass cover: Toughened glass

Lamp

Lamp specification: LED module, Multiple LED
Lamp power (W):

60W, 90W, 120W, 160W, 200W, 240W

Degree of protection: IP66

EXPLOSION-PROOF LED FLOODLIGHTS



HRT96

- ◆ Isolated LED lamp compartment and terminal compartment;
- ◆ Wind-convection heat dissipation structure.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)(applied for)
Ex db IIC T6 Gb
Ex tb IIIC T80°C Db
Europe (ATEX)(applied for)

Ex II 2 G Ex db IIC T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db

Certificates: IECEx; ATEX

Material

Enclosure: Copper-free aluminium alloy
Glass cover: Toughened glass

Lamp

Lamp specification: LED module, Multiple LED
Lamp power (W): 80W, 160W, 240W

Degree of protection: IP66

EXPLOSION-PROOF LED LIGHTINGS



HRND95

- ◆ International brand white light LED, reasonable arrangement of multi LED, high lighting efficiency and long service life.
- ◆ Two types of light distribution: spotlight and floodlight, which can be selected on request.
- ◆ Standard luminaries equip without lens, 30° lens and 60° lens which are optional, please indicate when placing an order.
- ◆ Standard luminaries do not equip with external lampshade, if need, please specify.
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Zones 2; 22

Explosion protection

- Global (IECEx)
- Ex nR IIC T□ Gc
- Ex tc IIIC T□ Dc
- Europe (ATEX)

- Ex II 3 G Ex nR IIC T□ Gc
- Ex II 3 D Ex tc IIIC T□ Dc

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Glass cover: Toughened glass

Lamp

Lamp specification: LED module, Multiple LED
Lamp power (W): 40W, 60W, 80W, 120W, 160W,
200W, 240W, 300W

Degree of protection: IP66

EXPLOSION-PROOF LED FLOODLIGHTS



HRNT95

- ◆ International brand white light LED, reasonable arrangement of multi LED, high lighting efficiency and long service life.
- ◆ Two types of light distribution: spotlight and floodlight, which can be selected on request.
- ◆ Standard luminaries equip with 60° lens, 30° lens which is optional, please indicate when placing an order.
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

Zones 2; 22

Explosion protection

- Global (IECEx)
- Ex nR IIC T□ Gc
- Ex tc IIIC T□ Dc
- Europe (ATEX)

- Ex II 3 G Ex nR IIC T□ Gc
- Ex II 3 D Ex tc IIIC T□ Dc

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Glass cover: Toughened glass

Lamp

Lamp specification: LED module, Multiple LED
Lamp power (W): 80W, 120W, 240W, 300W

Degree of protection: IP66

EXPLOSION-PROOF LIGHT FITTINGS



HRD61

- ◆ Three enclosure types: 150, 250, 400
- ◆ Integral control gear, easy installation and maintenance.
- ◆ Explosion-proof trigger, rapid starting, stable performance and long service life.
- ◆ Wireless connection between body and top cover, easy installation and maintenance.
- ◆ Powder coated wire guard, white.
- ◆ Toughened glass cover resistant to temperature changes

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex db IIC T4 or T3 Gb
- Ex tb IIIC T130°C or T190°C Db IP66
- Europe (ATEX)

- Ex II 2 G Ex db IIC T4 or T3 Gb
- Ex II 2 D Ex tb IIIC T130°C or T190°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Transparent cover: Toughened glass

Lamp

Lamp holder: E27; E40
Available lamp and lamp power (W):
HIE: 70W, 100W, 150W, 250W, 400W
HME: 80W, 125W, 250W, 400W
HSE: 70W, 100W, 150W, 250W, 400W

Note: HPI European standard ballast is available in general

Degree of protection: IP66



EXPLOSION-PROOF LIGHTINGS



BDD81

- The light fittings are supplied without lamp. PHILIPS lamps are recommended.

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex d IIC T4 Gb
- Ex t IIIC T130°C Db IP66
- Europe (ATEX)
- Ex II 2 G Ex d IIC T4 Gb
- Ex II 2 D Ex t IIIC T130°C Db IP66
- Certificates:** IECEx; ATEX; CU-TR
- Material**
- Enclosure: Copper-free aluminium alloy
- Transparent cover: Toughened glass
- Lamp**
- Lamp holder: E27
- Available lamp and lamp power (W):
- Incandescent lamp: 25W, 40W, 60W, 100W
- Energy-saving lamp: 9W, 11W (for sealed atmosphere)
- LED: 3W, 5W, 8W
- Degree of protection:** IP66

EXPLOSION-PROOF LIGHT FITTINGS



BDD91

- Applicable lamp (max.400W):
 - Metal halide lamp (HIE)
 - High pressure sodium lamp (HSE)
 - High pressure mercury lamp (HME)
- Three enclosure types: 150, 250, 400
- Integral control gear, easy installation and maintenance.

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex d IIC T□ Gb
- Ex t IIIC T□ Db IP66
- Europe (ATEX)
- Ex II 2 G Ex d IIC T□ Gb
- Ex II 2 D Ex tb IIIC T□ Db IP66
- Certificates:** IECEx; ATEX; CU-TR
- Material**
- Enclosure: Copper-free aluminium alloy
- Transparent cover: Toughened glass
- Lamp**
- Available lamp and lamp power (W):
- Available lamp:
- HIE: 70W, 100W, 150W, 250W, 400W
- HSE: 70W, 100W, 150W, 250W, 400W
- HME: 80W, 125W, 250W, 400W
- Lamp holder: E27, E40
- Note: HPI European standard ballast is available in general.
- Degree of protection:** IP66

EXPLOSION-PROOF LIGHT FITTINGS



BnD81

- Applicable lamp (max.400W):
 - Metal halide lamp (HIE)
 - High pressure sodium lamp (HSE)
 - High pressure mercury lamp (HME)
- Three enclosure types: 150, 250, 400
- Integral control gear, easy installation and maintenance.
- Both American standard and European standard are available.

Zones 2; 21&22

Class I, Division 2, Groups A, B, C, D

Explosion protection

- Global (IECEx)
- Ex nr IIC T4 or T3 Gc
- Ex tb IIIC T130°C or T190°C Db
- Europe (ATEX)
- Ex II 3 G Ex nr IIC T4 or T3 Gc
- Ex II 2 D Ex tb IIIC T130°C or T190°C Db
- Certificates:** IECEx; ATEX; UL; CU-TR
- Material**
- Enclosure: Copper-free aluminium alloy
- Transparent cover: Toughened glass
- Lamp**
- Lamp holder:
- American Standard: E26, E39; European Standard: E27, E40
- Available lamp and lamp power (W):

Available lamp	American Standard	European Standard
HIE	70W, 100W, 150W, 175W, 250W, 400W	70W, 100W, 150W, 250W, 400W
HSE	70W, 100W, 150W, 250W, 400W	70W, 100W, 150W, 250W, 400W
HME	-	80W, 125W, 250W, 400W

- Note: Please see Selection table of American standard HID lamp and corresponding electrical components
- Degree of protection:** IP65

EXPLOSION-PROOF FLOODLIGHTS



BAT53

- ◆ Four enclosure types: 125, 250, 400, 1000.
- ◆ Integral control gear, easy installation and maintenance.
- ◆ Rapid starting trigger, stable performance and long service life.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex d e IIB T \square Gb
Ex tb IIIC T \square Db IP66
Europe (ATEX)

Ex II 2 G Ex db e IIB T \square Gb
Ex II 2 D Ex tb IIIC T \square Db IP66

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Glass cover: Toughened glass

Lamp

Lamp holder: E27, E40
Available lamp and lamp power (W):
High pressure sodium lamp (HSE):
70W, 100W, 150W, 250W, 400W (tubular), 1000W
High pressure mercury lamp (HME):
80W, 125W, 250W

Metal halide lamp (HIE):

70W, 100W, 150W, 250W, 400W (tubular), 1000W

Note: HPI European standard ballast is available in general

Degree of protection: IP66

EXPLOSION-PROOF FLOODLIGHTS



BAT85

- ◆ Integral control gear, easy installation and maintenance.
- ◆ The light fittings are supplied without lamp. PHILIPS lamps are recommended.
- ◆ Both American standard and European standard are available.

Zones 1&2; 21&22

Class I, Division 1, Groups A, B, C, D

Explosion protection

Global (IECEx)
Ex db IIC T3 or xxx°C Gb
Ex tb IIIC Txxx°C Db IP66
Europe (ATEX)

Ex II 2 G Ex db IIC T3 or xxx°C Gb

Ex II 2 D Ex tb IIIC Txxx°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Glass cover: Toughened glass

Lamp

Lamp holder:
European standard: E27, E40, American standard: E26, E39

Available lamp:

Metal halide lamp (HIE): 70W, 100W, 150W, 250W, 400W

High pressure sodium lamp (HSE): 70W, 100W, 150W, 250W, 400W

High pressure mercury lamp (HME): 250W, 400W

Degree of protection: IP66

EXPLOSION-PROOF FLOODLIGHTS



BnT81

- ◆ Two enclosure types: 400, 1000.
- ◆ Type 400:
Lamp and ballast are of integral type.
Type 1000:
Lamp and ballast are split type.
- ◆ Both American standard and European standard are available.
- ◆ Type 400 are supplied without lamp. PHILIPS lamps are recommended.
- ◆ Type 1000 are supplied with lamp.

Zones 2; 21&22

Class I, Division 2, Groups A, B, C, D

Explosion protection

Global (IECEx)
Ex nR IIC xxx Gc
Ex tb IIIC Txxx°C Db IP65
Europe (ATEX)

Ex II 3 G Ex nR IIC xxx Gc

Ex II 2 D Ex t IIIC Txxx°C Db IP65

Certificates: IECEx; ATEX; UL; CU-TR

Material

Enclosure: Copper-free aluminium alloy
Glass cover: Toughened glass

Lamp

Lamp holder:
American Standard: E39; European Standard: E40
Available lamp and lamp power (W):

HIE: 175W, 250W, 400W, 1000W

HSE: 150W, 250W, 400W, 1000W

Note: Please see Selection table of American standard HID lamp and corresponding electrical components

Degree of protection: IP65

EXPLOSION-PROOF FLOODLIGHTS



HRT81

- ◆ Two enclosure types: 400, 1000.
- ◆ Type 400:
Lamp and ballast are of integral type.
Type 1000:
Lamp and ballast are split type.
- ◆ Type 400 are supplied without lamp,
PHILIPS lamps are recommended.
- ◆ Type 1000 are supplied with lamp.

Zones 2; 21&22

Explosion protection

Global (IECEx)(applied for)
Ex nR IIC T \square Gc
Ex t IIIC T \square Db IP66
Europe (ATEX)(applied for)

Ex II 3 G Ex nR IIC T \square Gc

Ex II 2 D Ex tb IIIC T \square Db IP66

Certificates: IECEx; ATEX

Material

Enclosure: 316 stainless steel
Glass cover: Toughened glass

Lamp

Lamp holder: E40
Available lamp and lamp power (W):
HIE: 250W, 400W, 1000W
HSE: 150W, 250W, 400W, 1000W
Note: HPI European standard ballast is available in general

Degree of protection: IP65

PORTRABLE SEARCHLIGHT



HRD305

- ◆ Heat resistant: LED radiator and battery are effectively isolated, which improves the stability of the light.
- ◆ Intelligent control: pulse dimming technology, strong light and working light can be changed at random, with battery detection indicator, which can detect the working condition at any time, intelligent charger is with protection circuit.
- ◆ Portable and flexible: small volume, light weigh, several types of handling like portable and on shoulder, meet different working requirement.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex d ia IIC T6 Gb
Ex tb IIIC T80°C Db IP68
Europe (ATEX)

Ex II 2 G Ex d ia IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP68

Certificates: IECEx; ATEX; CU-TR

Lamp (LED)

Rated power: 9W/3W

Current of strong light: 900mA

Degree of protection: IP68

SEARCHLIGHT



HRD309E

- ◆ Safe and reliable:
The product with good explosion-proof performance and antistatic effect, can safely and reliably work in various combustible areas.
- ◆ Efficient and energy-saving:
LED solid lamp, low energy consumption, high luminous efficacy, long service life, maintenance free and no subsequent usage cost, memory-free battery is recyclable, pollution-free.

Zones 2; 21&22

Explosion protection

Global (IECEx)
Ex nA nR IIC T4 Gc
Ex tb IIIC T80°C Db IP68
Europe (ATEX)

Ex II 3 G Ex nA nR IIC T4 Gc

Ex II 2 D Ex tb IIIC T80°C Db IP68

Certificates: IECEx; ATEX

Lamp

Rated power: 9W/3W

Average service life: 100000h

Degree of protection: IP68

EXPLOSION-PROOF INCANDESCENT HAND LAMPS



BSX-60

- ◆ Incandescent lamps: Max. 60W LED: Max. 8W.
- ◆ Cable on request.
- ◆ Handle in plastic, with control pushbutton.
- ◆ Powder coated wire guard, white.
- ◆ Movable transformer on request.

Zones 1&2

Explosion protection

Global (IECEx)

Ex d e IIC T4

Europe (ATEX)

Ex II 2 G Ex d e IIC T4

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy

Lamp

Lamp holder: E27

Available lamp:

Incandescent lamp: 25W, 40W, 60W

LED: 3W, 5W, 8W

Degree of protection: IP65

EXPLOSION-PROOF EMERGENCY LIGHT FITTINGS



BAJ52-20

- ◆ Lighting angle can be adjusted.
- ◆ Low-power halogen tungsten lamps, with reflector to increase lighting intensity.
- ◆ Emergency device with Ni-MH batteries, charging automatically; when power supply is cut off, the emergency device starts to work; with overcharge and overdischarge protection.

Zones 1&2

Explosion protection

Global (IECEx)

Ex d IIB T4

Europe (ATEX)

Ex II 2 G Ex d IIB T4

Certificates: IECEx; ATEX

Material

Enclosure: Copper-free aluminium alloy

Lamp

Available lamp:

Halogen tungsten lamp (LED on request)

Lamp power (W):

2 x 10W (LED lamp power: 2 x 1W)

Emergency time: 90min

Rated luminous flux:

Halogen tungsten lamp: 2 x 100lm (LED lamp: 2 x 90lm)

Degree of protection: IP65

EXPLOSION-PROOF EMERGENCY EXIT LIGHT FITTINGS



BAYD85

- ◆ Designed with test button and sleep button. The test button is for testing. Press the button, lamp shall automatically enter into emergency status. The sleep button is to stop the lamp source output, press this button, the lamp turned off, re-press the button, lamp on and return to work.
- ◆ Ultra-bright LED lamp, low power consumption and long service life up to 50,000 hours; energy saving and environmental protection.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db IIB T6 Gb

Ex db IIC T6 Gb

Ex tb IIIC T80°C Db

Europe (ATEX)

Ex II 2 G Ex db IIB T6 Gb

Ex II 2 G Ex db IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db

Certificates: IECEx; ATEX; CU-TR

Material

Enclosure: Copper-free aluminium alloy

Lamp

LED lamp (working voltage DC 3.6V)

Power consumption: 4W

Emergency time: 180min

Degree of protection: IP66



**EXPLOSION-PROOF
TANK INSPECTION VESSEL
LIGHT FITTINGS**



BAK51

- ◆ Available for 35W or 50W halogen tungsten lamp, with high light efficiency and long service life.
- ◆ A or B mounting type is optional.

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex db IIB T3 Gb
- Ex tb IIIC T190°C Db
- Europe (ATEX)
- Ex II 2 G Ex db IIB T3 Gb
- Ex II 2 D Ex tb IIIC T190°C Db

Certificates: IECEx; ATEX

Material

Enclosure: Copper-free aluminium alloy

Lamp

Available lamp: Halogen tungsten lamp

Lamp holder: GY6.35

Lamp power (W): 35W, 50W

Degree of protection: IP66

**EXPLOSION-PROOF
LED TANK INSPECTION VESSEL
LIGHT FITTINGS**



BAK85

- ◆ Applicable lamp and power: LED lamps, energy-saving and long service life, 9W.

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex db op is IIC T6 Gb
- Ex tb op is IIIC T80°C Db
- Europe (ATEX)
- Ex II 2 G Ex db op is IIC T6 Gb
- Ex II 2 D Ex tb op is IIIC T80°C Db

Certificates: IECEx; ATEX

Material

Enclosure: Copper-free aluminium alloy

Glass cover: Toughened glass

Lamp

Lamp specification:

International brand of LED module

Lamp power (W): 9W

Degree of protection: IP66

**EXPLOSION-PROOF
CAUTION SPOTLIGHT FITTINGS**



BSZD81-E

BSZD81-C



BSZD81

- ◆ Ultra-bright LED lamp, low consumption and long service life up to 50,000 hours, integrated chip control with various circuit protection.
- ◆ Synchronous flashing of light fittings through signal lines.

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex d e IIC T6 Gb
- Ex tb IIIC T80°C Db IP65
- Europe (ATEX)
- Ex II 2 G Ex d e IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db IP65

Certificates: ATEX; IECEx; CU-TR

Material

Enclosure: Copper-free aluminium alloy

Transparent cover: Toughened glass

Lamp

Lamp specification: LED

Lamp power (W):

BSZD81-E: <10W (continuous work)

BSZD81-C: 40W (continuous work)

Degree of protection: IP65

**EXPLOSION-PROOF
LOW INTENSITY
AIRCRAFT WARNING LIGHT**



BSZD85-E

- ◆ Ultra-bright LED lamp, low consumption and long service life up to 50,000 hours, integrated chip control with various circuit protection.
- ◆ Synchronous flashing of light fittings through signal lines.
- ◆ Low luminous intensity.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)(applied for)

Ex db IIC T6 Gb

Ex tb IIIC T80°C Db

Europe (ATEX)(applied for)

II 2 G Ex db IIC T6 Gb

II 2 D Ex tb IIIC T80°C Db

Certificates: ATEX; IECEx

Material

Enclosure: Copper-free aluminium alloy

Transparent cover: Toughened glass

Lamp

Lamp specification: LED

Lamp power (W): < 8W (continuous work)

Degree of protection: IP66

**EXPLOSION-PROOF
MEDIUM INTENSITY
AIRCRAFT WARNING LIGHT**



BSZD85-C

- ◆ Ultra-bright LED lamp, low consumption and long service life up to 50,000 hours, integrated chip control with various circuit protection.
- ◆ Synchronous flashing of light fittings through signal lines.
- ◆ Medium luminous intensity.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)(applied for)

Ex db eb ib IIC T6 Gb

Ex tb IIIC T80°C Db

Europe (ATEX)(applied for)

II 2 G Ex db eb ib IIC T6 Gb

II 2 D Ex tb IIIC T80°C Db

Certificates: ATEX; IECEx

Material

Enclosure: Copper-free aluminium alloy

Transparent cover: Toughened glass

Lamp

Lamp specification: LED

Lamp power (W): < 40W (continuous work)

Degree of protection: IP66

**EXPLOSION-PROOF
AUDIO AND VISUAL CAUTION
SPOTLIGHT FITTINGS**



BBJ81

- ◆ Ultra-bright LED lamp, low power consumption and long service life.
- ◆ Lamp colours: red, blue, yellow, green.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex d ib IIC T6 Gb

Ex t IIIC T80°C Db IP66

Europe (ATEX)

II 2 G Ex d ib IIC T6 Gb

II 2 D Ex t IIIC T80°C Db IP66

Certificates: ATEX; IECEx; CU-TR

Material

Enclosure: Copper-free aluminium alloy

Transparent cover: Toughened glass

Lamp

Lamp specification: LED

Lamp power (W): 5W

Degree of protection: IP66

**EXPLOSION-PROOF
CAUTION SPOTLIGHT FITTINGS**



BJD81

- ◆ Ultra-bright LED lamp, low power consumption and long service life.
- ◆ Lamp colour: red, blue, yellow, green.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex d IIC T6 Gb

Ex t IIIC T80°C Db IP66

Europe (ATEX)

II 2 G Ex d IIC T6 Gb

II 2 D Ex t IIIC T80°C Db IP66

Certificates: ATEX; IECEx; CU-TR

Material

Enclosure: Copper-free aluminium alloy

Transparent cover: Toughened glass

Lamp

Lamp specification: LED

Lamp power (W): 3W

Lamp colour: Red, blue, yellow, green

Degree of protection: IP66

EXPLOSION-PROOF ILLUMINATION SWITCHES



BZM

- ◆ Two options:
- On-off switch
- Changeover switch



Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex db IIC T6 Gb
- Ex tb IIIC T80°C Db
- Europe (ATEX)
- Ex II 2 G Ex db IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db
- Certificates:** IECEx; ATEX; CU-TR
- Enclosure material:** Copper-free Aluminium Alloy, powder coated surface
- Exposed fastener:** Stainless steel
- Rated voltage:** Max. 250V AC
- Rated current:** 16A, 25A
- Degree of protection:** IP66

EXPLOSION-PROOF JUNCTION BOXES



BHD51

- ◆ Six types: A, B, C, D, E, F.
- ◆ Type A, B, C, D, E in Copper-free Aluminium Alloy only;
- Type F in Copper-free Aluminium Alloy or cast iron.



Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex db IIC T6 Gb
- Ex tb IIIC T80°C Db
- Europe (ATEX)
- Ex II 2 G Ex db IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db
- Certificates:** IECEx; ATEX; CU-TR
- Enclosure material:** Copper-free Aluminium Alloy or cast iron, powder coated surface
- Exposed fastener:** Stainless steel
- Rated voltage:** Max. 500V AC
- Rated current:** 20A
- Degree of protection:** IP66

EXPLOSION-PROOF JUNCTION BOXES



BHD91

- ◆ Four types: A, B, C, D
- ◆ Copper-free aluminium alloy enclosure, power coated surface.



Zones 1&2; 21&22

Class I, Division 1, Groups A, B, C, D

Explosion protection

- Global (IECEx)
 - Ex db IIC T6 Gb
 - Ex tb IIIC T80°C Db IP66
 - Europe (ATEX)
 - Ex II 2 G Ex db IIC T6 Gb
 - Ex II 2 D Ex tb IIIC T80°C Db IP66
 - Certificates:** IECEx; ATEX; CU-TR; UL
 - Enclosure material:** Copper-free Aluminium Alloy, powder coated surface
 - Exposed fastener:** Stainless steel
 - Rated voltage:** Max. 500V AC
 - Rated current and Terminal data:**
- | Cross section | 2.5mm ² | 4mm ² | 6mm ² |
|-----------------|--------------------|------------------|------------------|
| Rated current | 24A | 32A | 41A |
| Terminal number | 12 | 10 | 8 |
- Degree of protection:** IP66

EXPLOSION-PROOF TERMINAL BOXES



Ex d IIB

BXJ-IIB

- ◆ Size and direction of cable entries can be customized on request.



Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db IIB+H₂ T6 or T5 Gb
Ex tb IIIC T80°C or T95°C Db IP66
Europe (ATEX)

Ex II 2 G Ex db IIB+H₂ T6 or T5 Gb
Ex II 2 D Ex tb IIIC T80°C or T95°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener: Stainless steel

Rated voltage: Max. 800V AC

Rated current:

Cross section	2.5mm ²	4mm ²	6mm ²	10mm ²	16mm ²	35mm ²	70mm ²	240mm ²
Rated current	24A	32A	41A	57A	76A	125A	192A	400A

Degree of protection: IP66

EXPLOSION-PROOF TERMINAL BOXES



Ex d IIC

BXJ-IIC

- ◆ Size and direction of cable entries can be customized on request.



Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex d IIC T6 Gb
Ex tb IIIC T80°C Db IP65
Europe (ATEX)

Ex II 2 G Ex d IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP65

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener: Stainless steel

Rated voltage: Max. 690V AC

Rated current:

Cross section	2.5mm ²	4mm ²	6mm ²	10mm ²	16mm ²	35mm ²	70mm ²	95mm ²
Rated current	24A	32A	41A	57A	76A	125A	192A	250A

Degree of protection: IP66

TERMINAL BOXES



Ex e IIC

BXJ-e

- ◆ Size and direction of cable entries can be customized on request.



Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex e IIC T6 or T5 Gb
Ex ib IIC T6 Gb
Ex tb IIIC T80°C Db IP66
Europe (ATEX)

Ex II 2 G Ex e IIC T6 or T5 Gb

Ex II 2 G Ex ib IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener: Stainless steel

Rated voltage: Max. 690V AC

Rated current:

Cross section	2.5mm ²	4mm ²	6mm ²	10mm ²	16mm ²	35mm ²
Ex e Rated current	24A	32A	41A	57A	76A	125A
Ex ib Rated current	5A	5A	5A	-	-	-

Degree of protection: IP66

TERMINAL BOXES



BXJ8050

◆ International brand of explosion-proof terminal blocks.

Zones 0&1&2; 21&22

Explosion protection

Global (IECEx)

Ex e IIC T6 or T5 Gb

Ex ia IIC T6 Ga

Ex tb IIIC T80°C Db IP66

Europe (ATEX)

Ex II 2 G Ex e IIC T6 or T5 Gb

Ex II 1 G Ex ia IIC T6 Ga

Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

GRP (glass fibre-reinforced polyester resin)

Exposed fastener: Stainless steel

Rated voltage: Max. 690V AC

Rated current:

Cross section	2.5mm ²	4mm ²	6mm ²	10mm ²	16mm ²	35mm ²
Ex e Rated current	24A	32A	41A	57A	76A	125A
Ex ia Rated current	5A	5A	5A	-	-	-

Degree of protection: IP66

JUNCTION BOXES



BXJ8050-20/6

◆ GRP (glass fibre-reinforced polyester resin) enclosure.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex e II T6

Europe (ATEX)

Ex II 2 G Ex e IIC T6 Gb

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

GRP (glass fibre-reinforced polyester resin)

Exposed fastener: Stainless steel

Rated voltage: Max. 500V AC

Rated current: 20A

Degree of protection: IP65

TERMINAL BOXES



BXJ-S

◆ International brand of explosion-proof terminal blocks.

Zones 0&1&2; 21&22

Class I, Division 2, Groups A, B,C,D

Explosion protection

Global (IECEx)

Ex eb IIC T6...T3 Gb

Ex ia IIC T6 Ga

Ex tb IIIC T80°C...T130°C Db

Europe (ATEX)

Ex II 2 G Ex eb IIC T6...T3 Gb

Ex II 1 G Ex ia IIC T6 Ga

Ex II 2 D Ex tb IIIC T80°C...T130°C Db IP66

Certificates: IECEx; ATEX; CU-TR; UL

Enclosure material:

Stainless steel

Exposed fastener: Stainless steel

Rated voltage: Max. 1000V AC, Max. 1500V DC

Cross section	2.5mm ²	4mm ²	6mm ²	10mm ²	16mm ²	35mm ²	70mm ²
Ex e Rated current	24A	32A	41A	57A	76A	125A	192A
Ex ia Rated current	5A	5A	-	-	-	-	-

Cross section	120mm ²	185mm ²	300mm ²	2 x 185mm ²	2 x 300mm ²	3 x 300mm ²
Ex e Rated current	269A	353A	520A	550A	700A	1000A
Ex ia Rated current	-	-	-	-	-	-

Degree of protection: IP66

EXPLOSION-PROOF PLUG AND SOCKETS



BCZ8060

- ◆ 2P, 3P, 4P and 5P.
- ◆ Only the switch in the socket cut off can plug be pulled out, power after inserting the plug.
- ◆ GRP (glass fibre-reinforced polyester resin).

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex db eb IIC T \square Gb
- Ex tb IIIC T \square °C Db IP66
- Europe (ATEX)
- Ex II 2 G Ex db eb IIC T \square Gb
- Ex II 2 D Ex tb IIIC T \square °C Db IP66

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

GRP (glass fibre-reinforced polyester resin)

Exposed fastener: Stainless steel

Rated voltage: MAX: 690V AC

Rated current:

10A, 16A, 20A, 32A, 50A, 60A, 63A, 100A, 125A

Degree of protection: IP66

EXPLOSION-PROOF PLUG AND SOCKETS



BCZ85

- ◆ Four enclosure types; Four current ratings (16A, 32A, 63A, 125A); 3P, 4P or 5P.
- ◆ Only the switch in the socket cut off can plug be pulled out, power after inserting the plug.
- ◆ Copper-free Aluminium Alloy enclosure, powder coated surface.

Zones 1&2; 21&22

Explosion protection

- Global (IECEx)
- Ex db IIC T6 Gb
- Ex tb IIIC T80°C Db IP66
- Europe (ATEX)
- Ex II 2 G Ex db IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Enclosure material: Copper-free Aluminium Alloy, powder coated surface

Exposed fastener: Stainless steel

Rated voltage: Max. 690V AC

Rated current:

10A, 16A, 20A, 32A, 50A, 60A, 63A, 100A, 125A

Degree of protection: IP66

EXPLOSION-PROOF PLUG CONNECTORS



BLJ85

- ◆ 4 enclosure types; 8 current ratings (10A, 16A, 25A, 32A, 63A, 100A); 2P, 3P, 4P and 5P.
- ◆ Copper-free Aluminium Alloy enclosure, anodic-oxidation treatment for surface.

Zones 2; 21&22

Explosion protection

- Europe (ATEX)
- Ex II 3 G Ex ec IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX (applied for)

Enclosure material: Copper-free Aluminium Alloy, anodic-oxidation treatment for surface

Exposed fastener: Stainless steel

Rated voltage: DC/AC 36V, 24V

AC 600V~690V, 480V~500V, 380V~415V,
200V~250V, 100V~130V

Rated current:

10A, 16A, 25A, 32A, 63A, 100A

Degree of protection: IP66

EXPLOSION-PROOF MOVABLE SWITCHBOARDS



BCZY

- ◆ Type A (portable type) and type B (push type) for option.
- ◆ The enclosure of type A (portable type): Stainless steel or GRP (glass fibre-reinforced polyester resin), the Max. transformer capacity of stainless steel product: 1600VA; the Max. transformer capacity of GRP product: 300VA.
- ◆ Several kinds of voltage for option.
- ◆ Portable type is equipped with 5m cable; push type is equipped with 20m cable; also can be customized on request.
- ◆ Type A with transformer function.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)(applied for)
Ex db eb IIC T4 Gb
Ex tb IIIC T80°C Db IP66
Europe (ATEX)(applied for)
Ex II 2 G Ex db eb IIC T4 Gb
Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX

Material:

Enclosure (Portable type): Stainless steel or GRP
Plug and flange type socket:
GRP (glass fibre-reinforced polyester resin)
Exposed fastener: Stainless steel

Rated voltage:

3P: 200~250V AC, 5P: 380~415V AC

Rated current:

16A

Degree of protection:

IP66

EXPLOSION-PROOF POSITION SWITCHES



HRZX91

- ◆ Types: D, Z, L, N, K.
- ◆ Increased safety enclosure with explosion-proof components.
- ◆ Copper-free Aluminium Alloy enclosure, powder coated surface.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db IIC T6 Gb
Ex tb IIIC T80°C Db IP66
Europe (ATEX)

Ex II 2 G Ex db IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener:

Stainless steel

Rated voltage:

240V AC, 250V DC

Rated current:

3A AC; 0.27A DC

Degree of protection:

IP66

EXPLOSION-PROOF CONTROL STATIONS



BZC

- ◆ Six types of enclosure.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db IIB+H₂ T6 Gb
Ex tb IIIC T80°C Db IP66
Europe (ATEX)

Ex II 2 G Ex db IIB+H₂ T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener:

Stainless steel

Rated voltage:

Max. 415V AC

Rated current:

10A

Degree of protection:

IP66

FLAMEPROOF PUSH BUTTON



HA

- ◆ Five different ways of operation
 - Spring-return push button
 - Key-operated push button
 - Mushroom stay-put emergency push button
 - Mushroom turn-to-release emergency push button
 - Rotary push button
- ◆ Mushroom stay-put emergency push button / mushroom turn-to-release emergency push button can be equipped with protection cover, please specify when ordering. Material of protection cover: stainless steel and PC, please specify when ordering.

Explosion protection

Global (IECEx)

Ex db IIC Gb

Ex tb IIIC Db

Europe (ATEX)

Ex II 2 G Ex db IIC Gb

Ex II 2 D Ex tb IIIC Db

Certificates: IECEx; ATEX

Rated voltage: 660V AC; 440V DC

Rated current: 10A(for 660V AC); 6A(for 440V DC)

Degree of protection: IP66

Zones 1&2; 21&22

INDICATORS



HD

- ◆ Available in
 - red
 - green
 - yellow
 - blue
 - white
- ◆ Two versions
 - screw connection
 - 2m cable connection

Explosion protection

Global (IECEx)

Ex db IIC Gb

Ex tb IIIC Db IP66

Europe (ATEX)

Ex II 2 G Ex db IIC Gb

Ex II 2 D Ex tb IIIC Db IP66

Certificates: IECEx; ATEX

Rated voltage:

440V AC, 50/60Hz; 220~415V AC, 50/60Hz;

220V DC; 48~120V AC/DC; 12~36V AC/DC

Degree of protection: IP66



Zones 1&2; 21&22

CONTROL SWITCHES



HK

- ◆ Available in latching and spring-return forms.
- ◆ Different function options.
- ◆ Number of pole: 2P, 3P, 4P, 6P.
- ◆ The switch shall be fitted inside Ex d enclosure.

Explosion protection

Global (IECEx)

Ex db IIC Gb

Ex tb IIIC Db

Europe (ATEX)

Ex II 2 G Ex db IIC Gb

Ex II 2 D Ex tb IIIC Db

Certificates: IECEx; ATEX

Rated voltage: 500V AC, 400V DC

Rated current: 16A

Degree of protection: IP66



Zones 1&2; 21&22

EXPLOSION-PROOF CONTROL UNIT SYSTEMS



BZA8050

- ◆ Three types of enclosure.
- ◆ Individual unit can be combined into larger units.

Explosion protection

Global (IECEx)
Ex d e IIC T6 Gb
Europe (ATEX)
Ex II 2 G Ex d e IIC T6
Certificates: IECEx; ATEX
Enclosure material: GRP (glass fibre-reinforced polyester resin)
Exposed fastener: Stainless steel
Rated voltage: Max. 415V AC
Rated current: 6A(IECEx); 10A(ATEX)
Degree of protection: IP65



Zones 1&2; 21&22

EXPLOSION-PROOF CONTROL UNIT SYSTEMS



BZA85

- ◆ push button, Indicator, Ammeter, Voltmeter.....

Explosion protection

Global (IECEx)
Ex db IIC T6 Gb
Ex tb IIIC T80°C Db IP66
Europe (ATEX)
Ex II 2 G Ex db IIC T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db IP66
Certificates: IECEx; ATEX; CU-TR
Enclosure material: Copper-free Aluminium Alloy, powder coated surface
Exposed fastener: Stainless steel
Rated voltage: Max.500V AC, 250V DC
Rated current: Max.10A (AC), 6A (DC)
Degree of protection: IP66



Zones 1&2; 21&22

CONTROL STATIONS (GRP)



BZC8050

- ◆ Four types of enclosure.

Explosion protection

Global (IECEx)
Ex d e IIC T6 Gb
Europe (ATEX)
Ex II 2 G Ex d e IIC T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db IP66
Certificates: IECEx; ATEX; CU-TR
Enclosure material: GRP (glass fibre-reinforced polyester resin)
Exposed fastener: Stainless steel
Rated voltage: Max. 415V AC
Rated current:
Main circuit current:
6A (for BZC8050-A2D2, BZC8050-A2B1)
16A (for BZC8050-K1)
10A (for others)
Degree of protection: IP65



Zones 1&2; 21&22

CONTROL STATIONS (ALUMINIUM ALLOY)



BZC8050

- ◆ Seven types of enclosure.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex d e IIC T6 Gb

Europe (ATEX)

Ex II 2 G Ex d e IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP65

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener: Stainless steel

Rated voltage: Max. 415V AC

Rated current:

Main circuit current:

6A (for BZC8050-A2D2, BZC8050-A2B1)

16A (for BZC8050-K1)

10A (for others)

Degree of protection: IP65

CONTROL STATIONS (STAINLESS STEEL)



BZC8050

- ◆ Five types of enclosure.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex d e IIC T6 Gb

Europe (ATEX)

Ex II 2 G Ex d e IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP65

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Stainless steel

Exposed fastener: Stainless steel

Rated voltage: Max. 415V AC

Rated current:

Main circuit current:

6A (for BZC8050-A2D2, BZC8050-A2B1)

16A (for BZC8050-K1)

10A (for others)

Degree of protection: IP65

CONTROL BUTTONS



BA8050

- ◆ 2 versions of component
 - 1 NO
 - 1 NC
- ◆ Eight different ways of operation
 - Spring-return control button
 - Mushroom stay-put emergency control button
 - Key-operated control button
 - Rotary control button
 - Double control button
 - Mushroom turn-to-release emergency control button
 - Push button with indicator
 - Key-operated mushroom turn-to-release emergency control fushbutton

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex d e IIC Gb

Europe (ATEX)

Ex II 2 G Ex d e IIC Gb

Certificates: IECEx; ATEX; CU-TR

Enclosure material: Polyamide (PA66)

Rated voltage: Max. 415V AC

Rated current: 6A

INDICATORS

BD8050

- ◆ Available in
 - red
 - green
 - yellow
 - blue
 - white
- ◆ Two mounting types
 - cover mounting
 - rail mounting

Explosion protection

Global (IECEx)
Ex d e IIC Gb
Europe (ATEX)
Ex II 2 G Ex d e IIC Gb
Certificates: IECEx; ATEX; CU-TR
Rated voltage:
12V...415V AC/DC (-10%...+6%)
Frequency: 0Hz...60Hz
Rated current: Max.15mA



Zones 1&2; 21&22

CONTROL SWITCHES

BK8050

- ◆ Number of pole: 2P, 3P, 4P, 6P.
- ◆ Available in latching and spring-return forms.

Explosion protection

Global (IECEx)
Ex d e IIC Gb
Europe (ATEX)
Ex II 2 G Ex d e IIC Gb
Certificates: IECEx; ATEX; CU-TR
Enclosure material: Plastic
Rated voltage: Max. 415V AC
Rated current: 16A



Zones 1&2; 21&22

EXPLOSION-PROOF AMMETERS / VOLTMETERS

BB8050

- ◆ Fast comparison of measured with set values.
- ◆ Versions available
 - Ammeter (type 72)
 - Voltmeter (type 72)

Explosion protection

Ammeter
Global (IECEx)
Ex eb IIC Gb
Europe (ATEX)
Ex II 2 G Ex eb IIC Gb
Voltmeter
Global (IECEx)
Ex eb mb IIC Gb
Europe (ATEX)
Ex II 2 G Ex eb mb IIC Gb
Certificates: IECEx; ATEX; CU-TR
Enclosure material: Flame retardant plastic
Insulation voltage: 690V AC
Frequency: 50/60Hz
DC available



Zones 1&2; 21&22

**EXPLOSION-PROOF
MOTOR SWITCHES**

BLK

- ◆ Classified as IIB according to gas atmosphere.
- ◆ Built-in MCB (miniature circuit breaker), MCCB (moulded case circuit breaker).
- ◆ Earth leakage protection device is optional.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db IIB T6 Gb

Ex tb IIIC T80°C Db

Europe (ATEX)

Ex II 2 G Ex db IIB T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Rated voltage:

Max. working voltage: 690V AC 50Hz/60Hz; 500V DC

Rated current: Max. 250A

Degree of protection: IP66

**EXPLOSION-PROOF
MOTOR SWITCHES**

BLK

- ◆ Classified as IIC according to gas atmosphere.
- ◆ Built-in MCB (miniature circuit breaker), MCCB (moulded case circuit breaker).
- ◆ Earth leakage protection device is optional.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db IIC T6 Gb

Ex tb IIIC T80°C Db IP66

Europe (ATEX)

Ex II 2 G Ex db IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener: Stainless steel

Rated voltage:

Max. working voltage: 690V AC 50Hz/60Hz; 500V DC

Rated current: Max. 250A

Degree of protection: IP66

**EXPLOSION-PROOF
MOTOR STARTERS**

BQD

- ◆ Classified as IIB according to gas atmosphere.
- ◆ Different motor starters.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db IIB T6 or T5 Gb

Ex tb IIIC T80°C or T95°C Db

Europe (ATEX)

Ex II 2 G Ex db IIB T6 or T5 Gb

Ex II 2 D Ex tb IIIC T80°C or T95°C Db

Certificates: IECEx; ATEX

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener: Stainless steel

Rated voltage: 380/400V AC 50/60Hz

Degree of protection: IP66

**EXPLOSION-PROOF
MOTOR STARTERS**

BQD

- ◆ Classified as IIC according to gas atmosphere.
- ◆ Different motor starters.

Zones 1&2

Explosion protection

Global (IECEx)

Ex d e IIC T6 Gb

Europe (ATEX)

Ex II 2 G Ex d e IIC T6

Certificates: IECEx; ATEX

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener: Stainless steel

Rated voltage: 380/400V AC 50/60Hz

Degree of protection: IP65

EXPLOSION-PROOF ILLUMINATION (POWER) DISTRIBUTION BOXES



BXM(D)51

- ◆ Enclosure for modular combination (Ex d & Ex e).
- ◆ Main switch and branch switch are operated with external rotary actuator.
- ◆ Internal wiring to the terminal is finished.
- ◆ International brand of explosion-proof terminal blocks.
- ◆ Special requirements on request.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex d IIB T6
Europe (ATEX)

Ex II 2 G Ex d e IIB T6

Certificates: IECEx; ATEX

Enclosure:

Enclosure material: Copper-free Aluminium Alloy, powder coated surface
Enclosure type: Modular combination (Ex d & Ex e); MCB, MCCB or other components in Ex d compartment, explosion-proof indicators and terminals in Ex e compartment.

Exposed fastener: Stainless steel

General power supply:

Rated voltage: max. 415V AC 50/60Hz;

Rated current: max. 250A

Branch current: Max. 63A

Degree of protection: IP65

EXPLOSION-PROOF ILLUMINATION (POWER) DISTRIBUTION BOXES



BXM(D)53

- ◆ Enclosure for modular combination (Ex d & Ex e).
- ◆ Main switch and branch switch are operated with external rotary actuator.
- ◆ Internal wiring to the terminal is finished.
- ◆ International brand of explosion-proof terminal blocks.
- ◆ Special requirements on request.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db eb IIC T6 Gb
Ex tb IIIC T80°C Db IP66
Europe (ATEX)

Ex II 2 G Ex db eb IIC T6 Gb

Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates: IECEx; ATEX; CU-TR

Enclosure:

Enclosure material: Copper-free Aluminium Alloy, powder coated surface
Enclosure type: Modular combination (Ex d & Ex e); MCB, MCCB or other components in Ex d compartment, explosion-proof indicators and terminals in Ex e compartment.

Exposed fastener: Stainless steel

General power supply:

Rated voltage: max. 690V AC 50/60Hz;

Rated current: max. 200A

Branch current: Max. 63A

Degree of protection: IP66

EXPLOSION-PROOF DISTRIBUTION PANELS



HRMD91

- ◆ Equipped with specialized hinge structure, which can prevent the flameproof joints from damage when opening and closing the box, and greatly prolong the service life of box.
- ◆ The boxes can be combined and installed freely to save space and meet the requirements of various distribution systems.
- ◆ Special requirements on request.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)
Ex db IIB+H₂ T□ Gb
Ex db [ib] IIB+H₂ T□ Gb
Ex tb IIIC T□ Db IP66
Europe (ATEX)

Ex II 2 G Ex db IIB+H₂ T□ Gb

Ex II 2 G Ex db [ib] IIB+H₂ T□ Gb

Ex II 2 D Ex tb IIIC T□ Db IP66

Certificates: ATEX and IECEx

Enclosure material: Copper-free Aluminium Alloy enclosure, powder coated surface

Exposed fastener: Stainless steel

Rated voltage: Max. 1000V AC 50/60Hz

Max. 1500V DC

Rated current: Max. 1200A

Degree of protection: IP66

EXPLOSION-PROOF DISTRIBUTION PANELS



HRMD92

- ◆ Equipped with specialized hinge structure, which can prevent the flameproof joints from damage when opening and closing the box, and greatly prolong the service life of box.
- ◆ The boxes can be combined and installed freely to save space and meet the requirements of various distribution systems.
- ◆ Special requirements on request.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)(I, II, IIB ... VIIB)

Ex db IIB+H₂ T□ Gb

Ex db [ib] IIB+H₂ T□ Gb

Ex tb IIIC T□ Db IP66

Global (IECEx)(VIII, VIIIB, IX, IXB)

Ex db IIB T□ Gb

Ex db [ib] IIB T□ Gb

Ex tb IIIC T□ Db IP66

Europe (ATEX)(I, II, IIB ... VIIB)

Ex II 2 G Ex db IIB+H₂ T□ Gb

Ex II 2 G Ex db [ib] IIB+H₂ T□ Gb

Ex II 2 D Ex tb IIIC T□ Db IP66

Europe (ATEX)(VIII, VIIIB, IX, IXB)

Ex II 2 G Ex db IIB T□ Gb

Ex II 2 G Ex db [ib] IIB T□ Gb

Ex II 2 D Ex tb IIIC T□ Db IP66

Certificates: IECEx; ATEX

Enclosure material: 316 stainless steel


Exposed fastener: Stainless steel

Rated voltage: Max. 1000V AC 50/60Hz

Max. 1500V DC

Rated current: Max. 2000A

Degree of protection: IP66

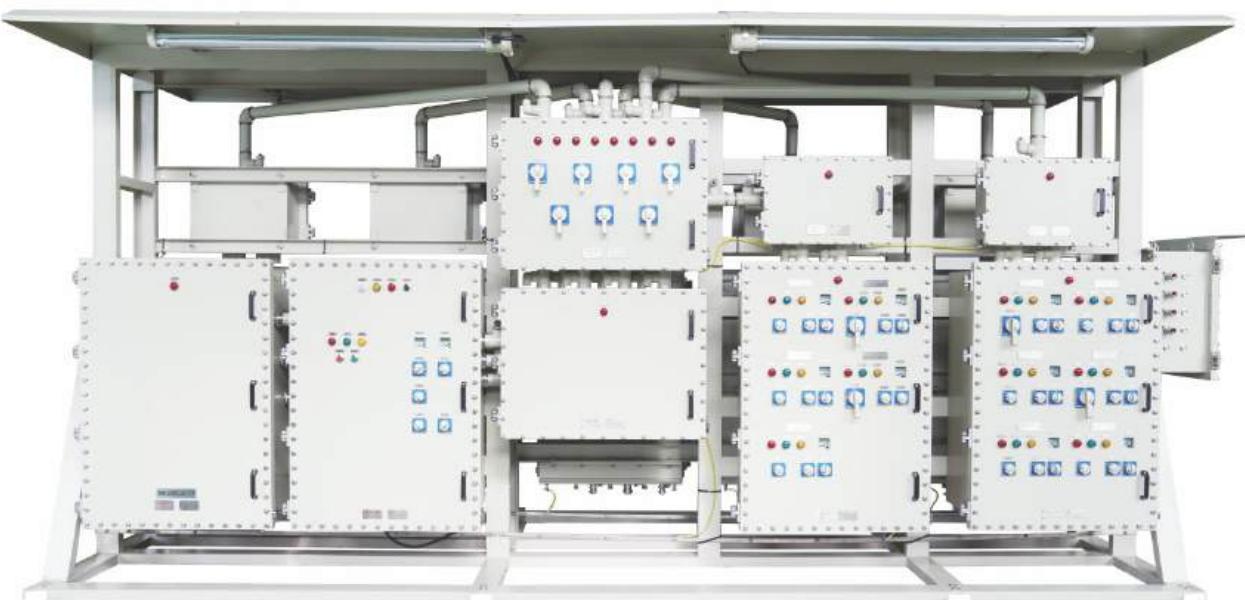

Warom can produce distribution box or combined distribution panel according to user's requirements, used in lighting system, power distribution system, motor control, socket, indicator light, switch, meter and electronic equipment used for control and signal can be attached; product is manufactured according to safety standard design and production;

EXPLOSION-PROOF DISTRIBUTION PANELS



HRMD93

- ◆ Enclosure for modular combination (Ex d & Ex e).
- ◆ Main switch and branch switch are operated with external rotary actuator.
- ◆ Internal wiring to the terminal is finished.
- ◆ International brand of explosion-proof terminal blocks.
- ◆ Copper-free Aluminium Alloy, powder coated surface.
- ◆ Special requirements on request.



Zones 1&2; 21&22

EXPLOSION-PROOF ILLUMINATION (POWER) DISTRIBUTION BOXES



Zones 1&2; 21&22

BXM(D)8050

- ◆ Enclosure for modular combination (Ex e).
- ◆ Main switch and branch switch are operated with external rotary actuator.
- ◆ Internal wiring to the terminal is finished.
- ◆ International brand of explosion-proof terminal blocks.
- ◆ Special requirements on request.

EXPLOSION-PROOF ILLUMINATION (POWER) DISTRIBUTION BOXES



Zones 1&2; 21&22

BXM(D)8061

- ◆ Enclosure for modular combination (Ex e).
- ◆ Main switch and branch switch are operated with external rotary actuator.
- ◆ Internal wiring to the terminal is finished.
- ◆ International brand of explosion-proof terminal.
- ◆ Special requirements on request.

Explosion protection

- Global (IECEx)
 - Ex db IIB+H₂ T6 Gb
 - Ex db eb IIB+H₂ T6 Gb
 - Ex db [ib] IIB+H₂ T6 Gb
 - Ex db eb [ib] IIB+H₂ T6 Gb
 - Ex tb IIIC T80°C Db IP66
- Europe (ATEX)(applied for)
 - Ex II 2 G Ex db IIB+H₂ T6 Gb
 - Ex II 2 G Ex db eb IIB+H₂ T6 Gb
 - Ex II 2 G Ex db [ib] IIB+H₂ T6 Gb
 - Ex II 2 G Ex db eb [ib] IIB+H₂ T6 Gb
 - Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates:

IECEx; ATEX

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Enclosure colour:

Window grey (RAL7040)

Exposed fastener:

Stainless steel

General power supply:

Rated voltage: max. 690V AC 50/60Hz;

Rated current: max. 630A

Branch current: 1A, 2A, 4A, 6A, 10A, 16A, 20A, 25A, 32A,

40A, 50A, 63A, 80A, 100A, 125A, 160A, 200A, 250A, 320A, 400A

Degree of protection: IP66

Explosion protection

- Global (IECEx)
 - Ex d e IIC T5 or T4 Gb
 - Ex tb IIIC T80°C Db IP66
- Europe (ATEX)
 - Ex II 2 G Ex d e IIC T5 or T4 Gb
 - Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates:

IECEx; ATEX; CU-TR

Enclosure:

Enclosure material:

GRP (glass fibre-reinforced polyester resin)

Enclosure colour: Black

Enclosure type: Ex e

Exposed fastener:

Stainless steel

General power supply:

Rated voltage: max. 690V AC 50/60Hz;

Rated current: max. 250A

Branch current:

1A, 2A, 4A, 6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A

Degree of protection: IP66

Explosion protection

- Global (IECEx)
 - Ex db eb IIC T5 or T4 Gb
 - Ex tb IIIC T80°C Db
- Europe (ATEX)
 - Ex II 2 G Ex db eb IIC T5 or T4 Gb
 - Ex II 2 D Ex tb IIIC T80°C Db

Certificates:

IECEx; ATEX

Enclosure:

Enclosure material: Stainless steel

Enclosure type: Ex e

Exposed fastener:

Stainless steel

General power supply:

Rated voltage: max. 690V AC 50/60Hz;

Rated current: max. 250A

Branch current:

1A, 2A, 4A, 6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A

Degree of protection: IP66

EXPLOSION-PROOF CIRCUIT BREAKER MODULES



BL8060

- ◆ Product of flame-proof structure; the cavity is of engineering plastic embedded with high strength metal frame structure; with strong corrosion-proof capacity and reliable performance.
- ◆ Built-in Schneider iC65 series MCB, special operation mechanism internally designed, reliable overall operation.

Zones 1&2

Explosion protection

Global (IECEx)

Ex d e IIC Gb

Europe (ATEX)

Ex II 2 G Ex d e IIC Gb

Certificates: IECEx; ATEX; INMETRO

Enclosure material:

GRP (glass fibre-reinforced polyester resin)

Rated voltage: Max.690V AC

Branch current:

1A, 2A, 4A, 6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A

EXPLOSION-PROOF FUSES



BRT8060

Explosion protection

Global (IECEx)

Ex eb mb IIC Gb

Europe (ATEX)(applied for)

Ex II 2 G Ex eb mb IIC Gb

Certificates: IECEx and ATEX

Enclosure material:

PC

Rated voltage: MAX. 500V AC/DC 50/60Hz

Branch current: 1A, 2A, 4A, 6A, 8A, 10A, 16A

EXPLOSION-PROOF ENCLOSURES



BXT-□-W

- ◆ Flameproof enclosure (Ex d IIB) in copper-free aluminium alloy, formed of low pressure casting. 13 versions (external flange).
- ◆ Cable entries can be drilled and components can be installed by user on request.
- ◆ Safety shall be considered when installing components according to related electrical standards.
- ◆ Special requirements on request.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db IIB+H₂ Gb

Ex tb IIIC Db IP66

Europe (ATEX)

Ex II 2 G Ex db IIB+H₂ Gb

Ex II 2 D Ex tb IIIC Db IP66

Certificates: IECEx; ATEX

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Exposed fastener: Stainless steel

Mounting feet:

Carbon steel, power coated surface

Degree of protection: IP66

INCREASED SAFETY ENCLOSURES



BXT-e

- ◆ Copper-free Aluminium Alloy enclosure (Ex e IIC), 8 versions.
- ◆ Cable entries can be drilled and components can be installed by user on request.
- ◆ Safety shall be considered when installing components according to related electrical standards.
- ◆ Special requirements on request.

Explosion protection

- Global (IECEx)
 Ex e IIC Gb
 Ex tb IIIC Db IP66
 Europe (ATEX)
 Ex II 2 G Ex e IIC Gb
 Ex II 2 D Ex tb IIIC Db IP66
Certificates: IECEx; ATEX; CU-TR
Enclosure material: Copper-free Aluminium Alloy, powder coated surface
Exposed fastener: Stainless steel
Degree of protection: IP66



Zones 1&2; 21&22

INCREASED SAFETY ENCLOSURES



BXT-S

- ◆ Increased-safety enclosure (Ex e) in stainless steel, 13 versions.
- ◆ Cable entries can be drilled and components can be installed by user on request.
- ◆ Safety shall be considered when installing components according to related electrical standards.
- ◆ Special requirements on request.

Explosion protection

- Europe (ATEX)
 Ex II 2 G Ex e II Gb
Certificates: ATEX
Enclosure material: Stainless steel
Exposed fastener: Stainless steel
Degree of protection: IP66



Zones 1&2

EXPLOSION-PROOF ENCLOSURES



BXT8050

- ◆ Increased-safety enclosure (Ex e) in GRP, 11 versions.
- ◆ Cable entries can be drilled and components can be installed by user on request.
- ◆ Safety shall be considered when installing components according to related electrical standards.
- ◆ Special requirements on request.

Explosion protection

- Europe (ATEX)
 Ex II 2 G Ex e II
Certificates: ATEX
Enclosure material: GRP (glass fibre-reinforced polyester resin)
Exposed fastener: Stainless steel
Degree of protection: IP65



Zones 1&2

EXPLOSION-PROOF WINDOW AIR CONDITIONERS



BKC

- ◆ For explosion-proof window air conditioner, the corresponding product is the cooling-only air conditioner in T1 and T3 group. It is mainly used in high temperature areas, such as Middle East, Middle Africa, Southeast Asia and tropical zone nearby the equator.
- ◆ Explosion-proof window air conditioner is based on renowned brand, by conducting explosion-proof treatment to internal control units compressor, indoor and outdoor fan motors, temperature sensor system, protective system, heat-removal system, cooling system, etc., after which the outline dimensions and installation are the same as the prototype.

Zones 2

Explosion protection

Global (IECEx)

Ex d nC IIB T4 Gc

Europe (ATEX)

Ex II 3 G Ex d nC IIB T4 Gc

Certificates: IECEx; ATEX; CU-TR

EXPLOSION-PROOF WALL AIR CONDITIONERS



BKF

- ◆ For explosion-proof wall air conditioner, both cooling-only and cooling & heating products in T1, T2, and T3 are available, to meet different requirements of low, medium and high temperature zones in the world.

Zones 1&2

Explosion protection

ATEX and CU-TR:

Outdoor unit

BYS Compressor Ex II 3 G Ex nC II 146°C (T3)

BZC Control station Ex II 3 G Ex d IIB

BDJ-W Fan motor Ex II 3 G Ex d IIB

Indoor unit

BDJ-N Fan motor Ex II 2 G Ex d IIB T4

BXK Control station Ex II 2 G Ex d [ib] ib IIB T4

IECEx:

Outdoor unit

Ex d nC IIB 146°C

Indoor unit

Ex d [ib] ib IIB T4

Whole unit

Ex nC d [ib] ib IIB 146°C

Certificates: IECEx; ATEX; CU-TR

EXPLOSION-PROOF WALL AIR CONDITIONERS



BKF(R)

- ◆ For explosion-proof wall air conditioner, both cooling-only and cooling & heating products in T1, T2, and T3 are available, to meet different requirements of low, medium and high temperature zones in the world.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex d e ib mb px IIC T4 Gb

Ex ibD tb pD IIIC T130°C Db IP66

Europe (ATEX)

Ex II 2 G Ex d e ib mb px IIC T4 Gb

Ex II 2 D Ex ib tb pD IIIC T130°C Db IP66

Certificates: IECEx; ATEX; CU-TR



EXPLOSION-PROOF PRESSURIZED DISTRIBUTION CABINETS



PXK

- ◆ Explosion-proof types IIB, IIC.
- ◆ Available in types G, X, Q, T, K.
- ◆ Cabinet type product adopts GGD frame; the main cavity and auxiliary cavity are of left and right structure; cable channel is of horizontal installation type; bottom inlet, front operation and back overhauling.
- ◆ Box type product adopts high quality steel plate welding structure; the main cavity and auxiliary cavity are of up and down structure; wall type installation; bottom inlet, front operation and back overhauling.
- ◆ The back doors of cabinet type and piano type are of rapid opening device, convenient for user to install and overhaul.

Explosion protection

- Global (IECEx)
- | | |
|-----------|-------------------------------|
| Ex Pz IIC | Ex pzc IIC T5 Gc |
| | Ex pzc IIIC T95°C Dc |
| Ex Px IIC | Ex db eb pxb IIC T4 Gb |
| | Ex pxb tb IIIC T130°C Db IP66 |
- Europe (ATEX)
- | | |
|-----------|---|
| Ex Pz IIC | Ex II 3 G Ex pz IIC T5 Gc |
| | Ex II 3 D Ex pD IIIC T95°C Dc |
| Ex Px IIC | Ex II 2 G Ex db eb pxb IIC T4 Gb |
| | Ex II 2 D Ex pxb tb IIIC T130°C Db IP66 |

Certificates: IECEx; ATEX

Enclosure material:

Stainless steel or powder coated carbon steel

Rated voltage: Max.1000V AC / 1500V DC

Rated current: Max.630A

Degree of protection: IP66



Zones 1&2; 21&22

EXPLOSION-PROOF ENGINEERING CABINS



PXB

- ◆ Enclosure in carbon steel or stainless steel.
- ◆ The explosion-proof control box is the standard control box or PLC programmed control box. Combustible gas detector and toxic gas detector are modular designed. The thermal detector, smoking detector, and pressure transmitter are intrinsic safety explosion-proof components. The power of explosion-proof centrifugal fan is subject to the room size. The type of explosion-proof air conditioner is subject to the room size. With audio and visual alarm interlock system. Illumination system is the explosion-proof fluorescent lamp. The light source of explosion-proof emergency lamp is LED.

Explosion protection

- Global (IECEx)
- | | |
|-----------------|----------------------|
| Ex px IIB T4 Gb | Ex px IIIC T130°C Db |
|-----------------|----------------------|
- Europe (ATEX)(applied for)
- | | |
|---------------------------|--------------------------------|
| Ex II 2 G Ex px IIB T4 Gb | Ex II 2 D Ex px IIIC T130°C Db |
|---------------------------|--------------------------------|
- Certificates:** IECEx; ATEX
- Enclosure material:**
- Powder coated carbon steel or stainless steel
- Rated voltage of user system:**
- 220V/380V/400V/440V/460V/660V/690V AC
- Rated voltage of pressurized control system:**
- 220V/380VAC 50/60Hz
- Rated current of pressurized control system:**
- 10A
- Degree of protection:** IP66



Zones 1&2; 21&22

EXPLOSION-PROOF CAMERA



BJK-S/G wired transmission



BJK-S/GW wireless transmission

BJK-S/G

- ◆ The explosion-proof camera is used as a fixed terminal in the intelligent video surveillance system for on-site scanning transmission, real-time video transmission or real-time video storage, remote network image transmission and other functions;
- ◆ Suitable for fixed-point monitoring of key areas; equipped with semi-fixed PTZ, whose angles can be adjusted vertically and horizontally;
- ◆ Intelligent temperature control devices can be installed inside, and the product can be applied to -60°C to +63°C harsh working conditions;
- ◆ The camera is configured with wireless module for transmitting video signals by using 4G, 5G, WIFI, and other wireless networks.

Explosion protection

Ex db II C T6 Gb

Ex tb III C T80°C Db

Rated voltage: 176-264VAC, 88-132VAC, 24VAC, 24VDC and 12VDC

Resolution: 2 million pixels

3 million pixels

4 million pixels

Ingress protection: IP68

Corrosion-proof level: WF2

Minimum illumination:

Color: ≤0.001lx (AGC ON)

Black & White: ≤0.0001lx(AGC ON)

Video coding format: H.265, H.264, H.264B, MJPEG

Wireless module: support 4G, 5G, WIFI connection

Material: 304 stainless steel or 316L

Cable gland: 2×M20×1.5 inlet port

suitable for Φ6.5mm~Φ14.5mm cable

Installation method: fixed bracket, base, column

Weight: 5kg



Zones 1&2; 21&22

EXPLOSION-PROOF CAMERA



BJK-S/GD wired transmission



BJK-S/GDW wireless transmission

BJK-S/GD

- ◆ The explosion-proof camera is used as a fixed terminal in the intelligent video surveillance system for on-site scanning transmission, real-time video transmission or real-time video storage, remote network image transmission and other functions;
- ◆ With infrared fill light function, the light can be changed to white light as needed;
- ◆ Suitable for fixed-point monitoring of key areas; equipped with semi-fixed PTZ, whose angles can be adjusted vertically and horizontally;
- ◆ Intelligent temperature control devices can be installed inside, and the product can be applied to -60°C to +63°C harsh working conditions;
- ◆ The camera is configured with wireless module for transmitting video signals by using 4G, 5G, WIFI, and other wireless networks.

Explosion protection

Ex db II C T6 Gb

Ex tb III C T80°C Db

Rated voltage: 176-264VAC, 88-132VAC, 24VAC, 24VDC and 12VDC

Resolution: 2 million pixels

3 million pixels

4 million pixels

Ingress protection: IP68

Corrosion-proof level: WF2

Minimum illumination:

Color: ≤0.001lx (AGC ON)

Black & White: ≤0.0001lx(AGC ON)

Infrared fill light distance: 30m, 50m, 100m

Video coding format: H.265, H.264, H.264B, MJPEG

Wireless module: support 4G, 5G, WIFI connection

Material: 304 stainless steel or 316L

Cable gland: 2×M20×1.5 inlet port

suitable for Φ6.5mm~Φ14.5mm cable

Installation method: fixed bracket, base, column

Weight: 5kg



Zones 1&2; 21&22



EXPLOSION-PROOF INTEGRATED CAMERA



BJK-YT/B wired transmission



BJK-YT/BW wireless transmission

BJK-YT/B

- ◆ The explosion-proof integrated camera is used as a fixed terminal in the intelligent video surveillance system for on-site video image perception upload and other functions; the device has a variety of intelligent behavioral detection; support the linkage action of multiple trigger rules;
- ◆ Suitable for all-round monitoring of key areas; the product supports horizontal 360° rotating and vertical ±90° rotating;
- ◆ Intelligent temperature control devices can be installed inside, and the product can be applied to -60°C to +63°C harsh working conditions;
- ◆ The camera is configured with wireless module for connecting with the platform by using 4G, 5G, WIFI, and other wireless networks and Internet networks.

Explosion protection

Ex db II C T6 Gb

Ex tb III C T80°C Db

Rated voltage: 264VAC to 176VAC,

132VAC to 88VAC, 24VAC or 24VDC

Resolution: 2 million pixels

3 million pixels

4 million pixels

Optical zoom: 25x, 30x

Ingress protection: IP66

Corrosion-proof level: WF2

Minimum illumination:

Color: ≤0.001lx (AGC ON)

Black & White: ≤0.0001lx(AGC ON)

Video coding format: H.265, H.264, H.264B, MJPEG

Angle adjustment: horizontal 360° rotation
vertical -90°~+90° rotation

Wireless module: support 4G, 5G, WIFI connection

Material: 304 stainless steel or 316L

Cable gland: M25×1.5 or 3/4" NPT inlet port
suitable for Φ10mm~Φ14mm cable

Installation method: fixed bracket, base, column

Weight: 30kg



Zones 1&2; 21&22

EXPLOSION-PROOF INTEGRATED CAMERA



BJK-YT/BD wired transmission



BJK-YT/BDW wireless transmission

BJK-YT/BD

- ◆ The explosion-proof integrated camera is used as a fixed terminal in the intelligent video surveillance system for on-site video image perception upload and other functions; the device has a variety of intelligent behavioral detection; support the linkage action of multiple trigger rules;
- ◆ With infrared fill light function, the light can be changed to white light as needed;
- ◆ Suitable for all-round monitoring of key areas; the product supports horizontal 360° rotating and vertical ±90° rotating;
- ◆ Intelligent temperature control devices can be installed inside, and the product can be applied to -60°C to +63°C harsh working conditions;
- ◆ The camera is configured with wireless module for connecting with the platform by using 4G, 5G, WIFI, and other wireless networks and Internet networks.

Explosion protection

Ex db II C T6 Gb

Ex tb III C T80°C Db

Rated voltage: 264VAC to 176VAC,

132VAC to 88VAC, 24VAC or 24VDC

Resolution: 2 million pixels

3 million pixels

4 million pixels

Optical zoom: 25x, 30x

Ingress protection: IP66

Corrosion-proof level: WF2

Minimum illumination:

Color: ≤0.001lx (AGC ON)

Black & White: ≤0.0001lx(AGC ON)

Infrared fill light distance: 30m, 50m, 100m

Video coding format: H.265, H.264, H.264B, MJPEG

Angle adjustment: horizontal 360° rotation
vertical -90°~+90° rotation

Wireless module: support 4G, 5G, WIFI connection

Material: 304 stainless steel or 316L

Cable gland: M25×1.5 or 3/4" NPT inlet port
suitable for Φ10mm~Φ14mm cable

Installation method: fixed bracket, base, column


Weight: 30kg



Zones 1&2; 21&22

**EXPLOSION-PROOF
OVERFLOW STATIC GROUNDING
CONTROL SYSTEM
(VOICE PROMPT FUNCTION)**


BXCQ-YJC/(II)

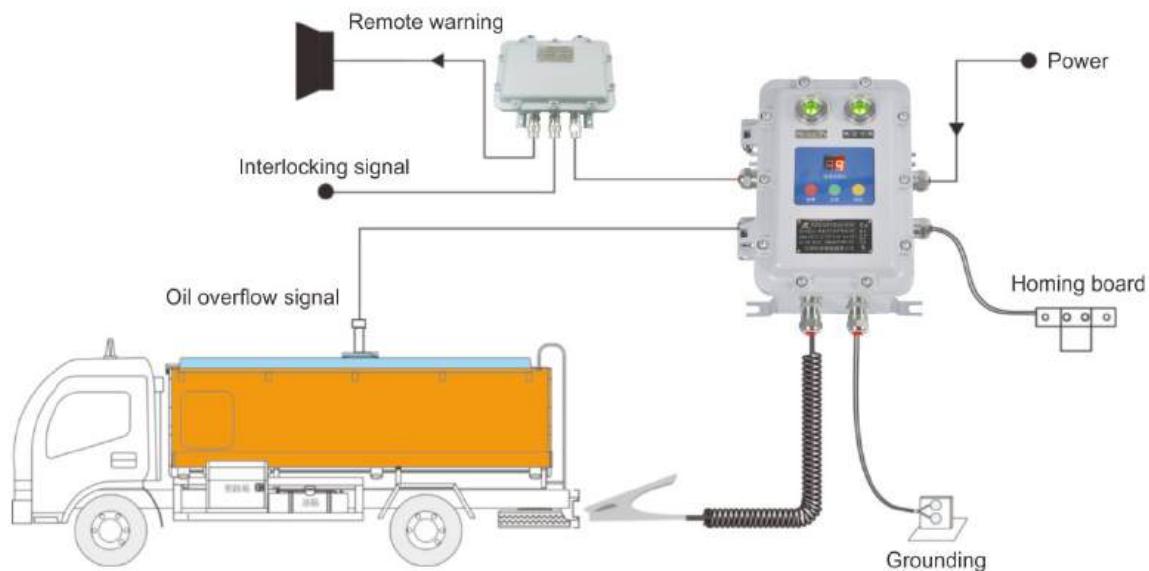

Zones 1&2; 21&22

**EXPLOSION-PROOF
STATIC GROUNDING
CONTROL SYSTEM**

BXCQ-JC

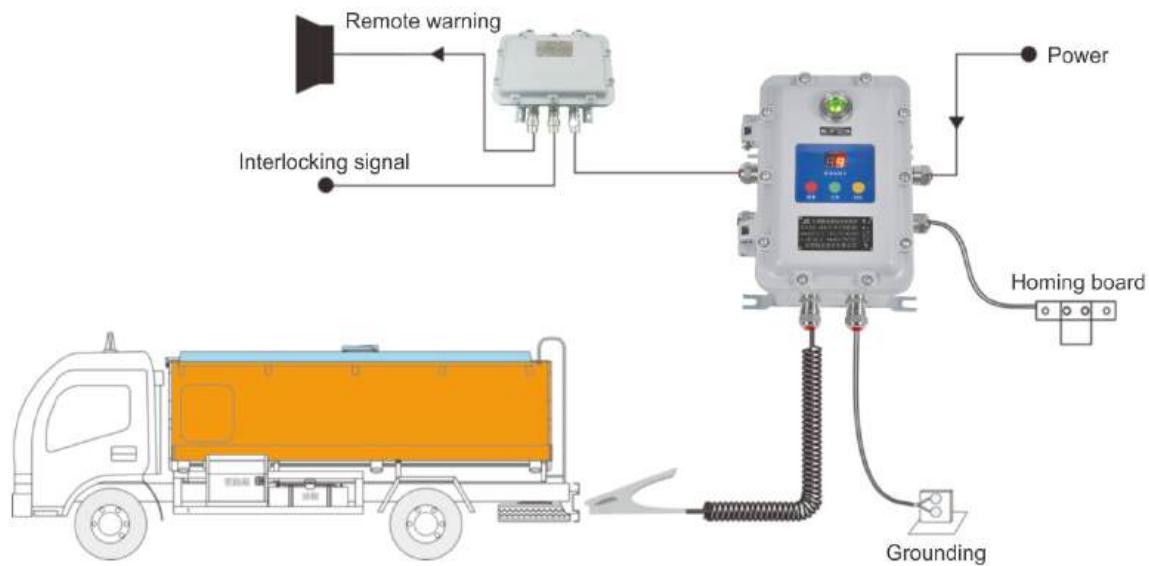


Zones 1&2; 21&22



**EXPLOSION-PROOF
OVERFLOW
CONTROL SYSTEM**


BXCQ-YC

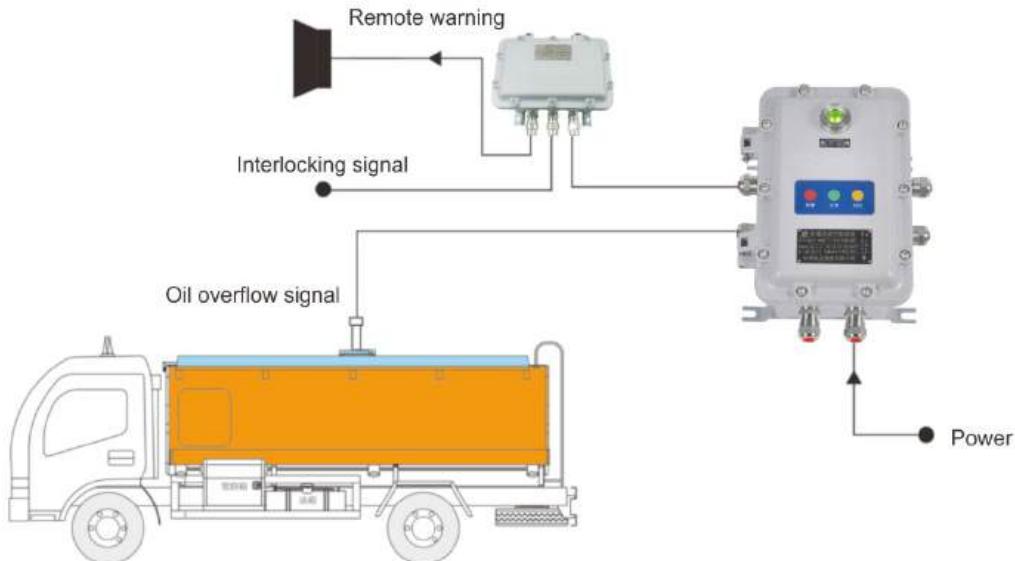

Zones 1&2; 21&22

**EXPLOSION-PROOF
STATIC GROUNDING
CONTROL SYSTEM
(DUAL PURPOSES OF MAN AND MOTOR)**

BXCQ-JCL

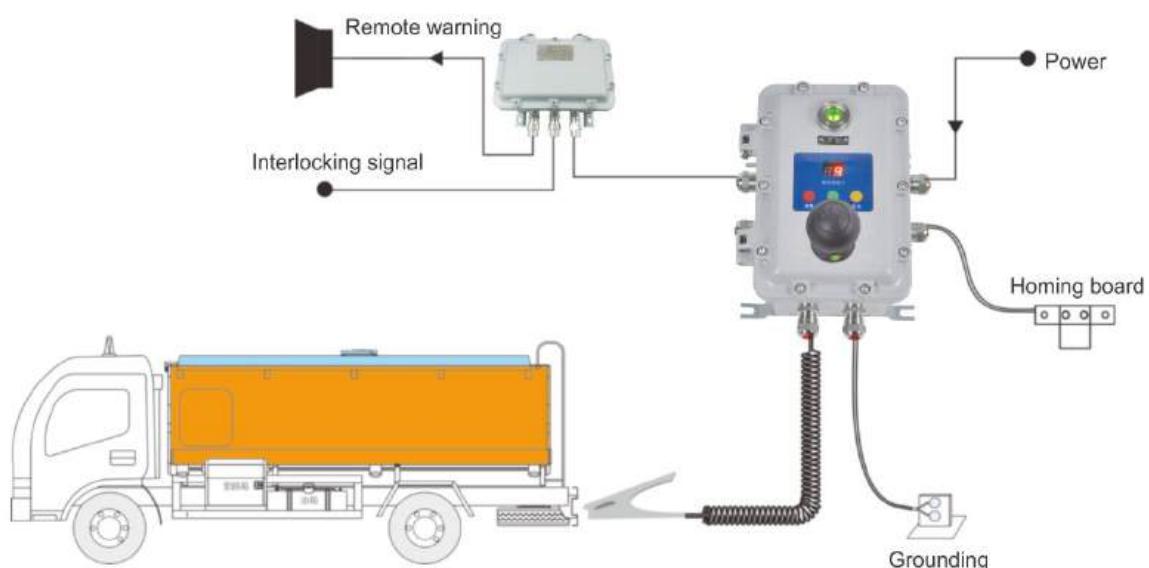

Zones 1&2; 21&22

**EXPLOSION-PROOF OVERFLOW
STATIC GROUNDING
CONTROLLER**



BXCQ-YJC

◆ Aluminium alloy enclosure

Zones 1&2; 21&22

Explosion protection

Ex II 2 G Ex db [ia] IIB+H₂ T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db IP66
Protection degree: IP66
Response time: <1S
Test resistance: <10Ω
Working voltage: 220VAC or 24VDC
Working current: <20mA
Warning method: Interlocking signal and three color light instruction
Output signal: Relay output, NO NC is optional, 10A 30VDC or 10A 250VAC

**EXPLOSION-PROOF STATIC
GROUNDING CONTROLLER**



BXCQ-JC

◆ Aluminium alloy enclosure

Zones 1&2; 21&22

Explosion protection

Ex II 2 G Ex db [ia] IIB+H₂ T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db IP66
Protection degree: IP66
Response time: <1S
Test resistance: <10Ω
Working voltage: 220VAC or 24VDC
Working current: <20mA
Warning method: sound and light alarm (optional)
Output signal: Relay output, NO NC is optional, 10A 30VDC or 10A 250VAC

**EXPLOSION-PROOF
OVERFLOW CONTROLLER**



BXCQ-YC

◆ Aluminium alloy enclosure

Zones 1&2; 21&22

Explosion protection

Ex II 2 G Ex db [ia] IIB+H₂ T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db IP66
Protection degree: IP66
Response time: <1S
Working voltage: 220VAC or 24VDC
Working current: <20mA
Warning method: Interlocking signal and three color light instruction
Output signal: Relay output, NO NC is optional, 10A 30VDC or 10A 250VAC

**EXPLOSION-PROOF STATIC
GROUNDING CONTROLLER
(DUAL PURPOSES OF MANAND MOTOR)**



BXCQ-JCL

◆ Aluminium alloy enclosure

Zones 1&2; 21&22

Explosion protection

Ex II 2 G Ex db [ia] IIB+H₂ T6 Gb
Ex II 2 D Ex tb IIIC T80°C Db IP66
Protection degree: IP66
Response time: <1S
Test resistance: <10Ω
Working voltage: 220VAC or 24VDC
Working current: <20mA
Warning method: sound and light alarm (optional)
Output signal: Relay output, NO NC is optional, 10A 30VDC or 10A 250VAC
Touching ball material: Electrostatic conductor
Touching ball diameter: 90mm



EXPLOSION-PROOF JUNCTION BOX



BXJ-IIB

- ◆ Aluminium alloy enclosure



Zones 1&2; 21&22

STATIC GROUNDING CLAMP



Explosion protection

- Ex II 2 G Ex db IIB+H₂ T6 Gb
 - Ex II 2 D Ex tb IIIC T80°C Db IP66
- Protection degree: IP66

CORROSION RESISTANCE HELICAL LINE



- ◆ The length of helical Line is customized,
the max length is 15m

Clamp tooth material: Tungsten alloy

Opening range:


Clamp body material: 304 (316 optional)

HOMING BOARD



Material: 304 stainless steel

HELICOPTER LANDING PLATFORM AID SYSTEM

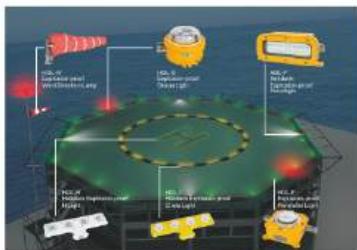

- ◆ Widely used for landing aid signal on helideck of marine engineering oil and gas drilling platforms and ships etc. hazardous area.
- ◆ Can reliably work in severe environment where is easily affected by moisture, vibration, or corrosion.

Zones 1&2; 21&22

Executive Standard

- ◆ Comply with CAP 437 ICAO Annex 14, IMO standard requirements.
- ◆ Comply with IEC60079, EN60079, GB/T3836 standards.

System Features

- ◆ High-performance explosion-proof security
- ◆ Long-life LED light source > 100000h
- ◆ High degree of protection: IP66 / IP67
- ◆ High anti-corrosion design, adapt to the marine environment
- ◆ Temperature: -40°C ~ +55°C

HELIDECK EXPLOSION-PROOF H LIGHT



HDL-H

- ◆ Enclosure uses high quality maritime aluminium alloy, which is applied to the ocean environment.
- ◆ LED green light source, service life is up to 100000 hours.
- ◆ Standard light and bright light of light fittings can be switched through controlling the system and the dimming instruction of light fittings.
- ◆ Professional optics software designed secondary light distribution system, conform to CAP437 standard requirements.
- ◆ Total height is less than 25mm, protection degree is higher to IP66/IP67/IP69.

Zones 1&2; 21&22

Explosion protection

- Ex II 2 G Ex db eb IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db IP66/IP67

HELIDECK EXPLOSION-PROOF CIRCLE LIGHT



HDL-C

- ◆ Enclosure uses high quality maritime aluminium alloy, which is applied to the ocean environment.
- ◆ LED yellow light source, service life is up to 100000 hours.
- ◆ Standard light and bright light of light fittings can be switched through controlling the system and the dimming instruction of light fittings.
- ◆ Professional optics software designed secondary light distribution system, conform to CAP437 standard requirements.
- ◆ Total height is less than 25mm, protection degree is higher to IP66/IP67/IP69.

Zones 1&2; 21&22

Explosion protection

- Ex II 2 G Ex db eb IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db IP66/IP67

EXPLOSION-PROOF PERIMETER LIGHT



HDL-P

- ◆ Enclosure is precision casting by 316 stainless steel, powder coated on surface after finish machining, strong corrosion resistance.
- ◆ LED green light source, service life is up to 100000 hours.
- ◆ Professional optics software designed secondary light distribution system, conform to CAP437 standard requirements.
- ◆ Total height is less than 100mm, protection degree is higher to IP66/IP67.

Zones 1&2; 21&22

Explosion protection

- Ex II 2 G Ex db eb IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db IP66/IP67



HELIDECK EXPLOSION-PROOF FLOODLIGHT



EXPLOSION-PROOF STATUS LIGHT



EXPLOSION-PROOF WIND DIRECTION LAMP



HDL-F

- ◆ Enclosure uses maritime aluminium alloy, powder coated on surface after preservative treatment.
- ◆ LED white light source, service life is up to 100000 hours.
- ◆ In-built constant voltage constant current driving power, wide voltage input, constant power output, fast start, stable performance, surge resistance, overcurrent, open circuit, short circuit, etc. protection function.
- ◆ Total height is less than 135mm, protection degree is higher to IP66/IP67.

Zones 1&2; 21&22

Explosion protection

- Ex II 2 G Ex db eb mb op is IIC T5 or T4 Gb
- Ex II 2 D Ex op is tb IIIC T95°C or T130°C Db IP66/IP67

HDL-S

- ◆ Enclosure uses maritime aluminium alloy, powder coated on surface after preservative treatment.
- ◆ Professional optics software designed secondary light distribution system, conform to CAP437 standard requirements.
- ◆ Through the control system, status instructions are given to the lamps. The red LED light source flashes and gives warning signals.
- ◆ Protection degree is higher to IP66.

Zones 1&2; 21&22

Explosion protection

- Ex II 2 G Ex db IIC T6 Gb
- Ex II 2 D Ex tb IIIC T80°C Db IP66

EXPLOSION-PROOF DISTRIBUTION PANELS



HRMD91

- ◆ Copper-free Aluminium Alloy enclosure, powder coated surface.
- ◆ Equipped with specialized hinge structure, which can prevent the flameproof joints from damage when opening and closing the box, and greatly prolong the service life of box.
- ◆ The boxes can be combined and installed freely to save space and meet the requirements of various distribution systems.
- ◆ Special requirements on request.

Zones 1&2; 21&22

Explosion protection

- Ex II 2 G Ex db IIB+H₂ T6 Gb
- Ex II 2 G Ex tb IIIC T80°C Db IP66

EXPLOSION-PROOF ALUMINIUM ALLOY BUSHINGS



BHC

- ◆ Ex e enclosure.
- ◆ Widely used for connection in steel pipe wiring system.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex eb IIC Gb

Ex tb IIIC Db

Europe (ATEX)

Ex II 2 G Ex eb IIC Gb

Ex II 2 D Ex tb IIIC Db

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Type: A, B, C, D, E, F, G, H

Connection thread: M20-M63

NPT1/2"-NPT2"

G1/2"-G2"

Degree of protection: IP66

EXPLOSION-PROOF CAST IRON BUSHINGS



BHC

- ◆ Ex e enclosure.
- ◆ Widely used for connection in steel pipe wiring system.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex eb IIC Gb

Ex tb IIIC Db

Europe (ATEX)

Ex II 2 G Ex eb IIC Gb

Ex II 2 D Ex tb IIIC Db

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Cast iron, powder coated surface

Type: A, B, C, D, E, F, G, H

Connection thread: M20-M63

NPT1/2"-NPT2"

G1/2"-G2"

Degree of protection: IP66

EXPLOSION-PROOF CONNECTORS



BGJ

- ◆ Available in nickel plated brass, stainless steel or galvanized carbon steel.

Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db IIC Gb

Ex eb IIC Gb

Ex tb IIIC Db

Europe (ATEX)

Ex II 2 G Ex db IIC Gb

Ex II 2 G Ex eb IIC Gb

Ex II 2 D Ex tb IIIC Db IP66

Certificates: IECEx; ATEX; CU-TR

Material: Nickel plated brass, stainless steel or galvanized carbon steel

Type: F/F, M/F or M/M

Connection thread: M20-M110

NPT1/2"-NPT4"

G1/2"-G4"

Degree of protection: IP66



EXPLOSION-PROOF SEAL BUSHINGS



BAG

- ◆ Widely used for isolating seal between pipes or pipes and explosion-proof enclosures.



Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db IIC Gb

Ex eb IIC Gb

Ex tb IIIC Db IP66

Europe (ATEX)

Ex II 2 G Ex db IIC Gb

Ex II 2 G Ex eb IIC Gb

Ex II 2 D Ex tb IIIC Db IP66

Certificates: IECEx; ATEX; CU-TR

Enclosure material:

Copper-free Aluminium Alloy, powder coated surface

Type: Type Z, Type H, Type P

Connection thread: M20-M63

NPT1/2"-NPT2"

G1/2"-G2"

Degree of protection: IP66

EXPLOSION-PROOF CABLE GLANDS PLASTIC UNARMORED



DQM-I

- ◆ Ex e structure.
- ◆ Single seal, suitable for unarmored cable.



Zones 1&2

Explosion protection

Global (IECEx)

Ex e II

Europe (ATEX)

Ex II 2 G Ex e IIC Gb

Certificates: IECEx; ATEX; CU-TR

Gland material: Plastic, black

Connection thread: M16-M63

G3/4"

Degree of protection: IP65

EXPLOSION-PROOF CABLE GLANDS METAL UNARMORED



DQM-I

- ◆ Ex e structure.
- ◆ Single seal, suitable for unarmored cable.



Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex eb IIC Gb

Ex tb IIIC Db IP66 / IP67

Europe (ATEX)

Ex II 2 G Ex e IIC Gb

Ex II 2 D Ex tb IIIC Db IP66 / IP67

Certificates: IECEx; ATEX; CU-TR

Gland material:

Stainless steel or nickel plated brass

Connection thread: M20-M75

NPT1/2"-NPT2 1/2"

G1/2"-G2 1/2"

Degree of protection: IP66/IP67

EXPLOSION-PROOF CABLE GLANDS METAL ARMORED



Cable wiring



Steel pipe wiring

DQM-I

- ◆ Ex e structure.
- ◆ Single seal, suitable for both armored and unarmored cable.
- ◆ EMC Cable Gland. (360° contact) - EMC tested.

Explosion protection

Global (IECEx)
 Ex eb IIC Gb
 Ex tb IIIC Db IP66 / IP67
 Europe (ATEX)
 Ex II 2 G Ex e IIC Gb
 Ex II 2 D Ex tb IIIC Db IP66 / IP67

Certificates: IECEx; ATEX; CU-TR

Gland material:

Stainless steel or nickel plated brass

Connection thread: M20-M115
 NPT1/2"-NPT4"
 G1/2"-G4"

Degree of protection: IP66/IP67



Zones 1&2; 21&22

EXPLOSION-PROOF CABLE GLANDS UNARMORED SINGLE SEAL



Cable wiring



Steel pipe wiring

DQM-II

- ◆ Ex d, Ex e structure.
- ◆ Single seal, suitable for unarmored cable.

Explosion protection

Global (IECEx)
 Ex d IIC Gb
 Ex e IIC Gb
 Ex tb IIIC Db IP66
 Europe (ATEX)
 Ex II 2 G Ex d IIC Gb
 Ex II 2 G Ex e IIC Gb
 Ex II 2 D Ex tb IIIC Db IP66

Certificates: IECEx; ATEX; CU-TR

Gland material:

Stainless steel or nickel plated brass

Connection thread: M20-M115
 NPT1/2"-NPT4"
 G1/2"-G4"

Degree of protection: IP66 (IP67 optional)



Zones 1&2; 21&22

EXPLOSION-PROOF CABLE GLANDS ARMORED DUAL SEAL



Cable wiring



Steel pipe wiring

DQM-II

- ◆ Ex d, Ex e structure.
- ◆ Dual seal, suitable for both armored and unarmored cable.
- ◆ EMC Cable Gland. (360° contact) - EMC tested.
- ◆ For particular use with: cables that exhibit "cold flow" characteristics.

Explosion protection

Global (IECEx)
 Ex d IIC Gb
 Ex e IIC Gb
 Ex tb IIIC Db IP66
 Europe (ATEX)

Ex II 2 G Ex d IIC Gb
 Ex II 2 G Ex e IIC Gb
 Ex II 2 D Ex tb IIIC Db IP66

Certificates: IECEx; ATEX; CU-TR

Gland material:

Stainless steel or nickel plated brass

Connection thread: M20-M115
 NPT1/2"-NPT4"
 G1/2"-G4"

Degree of protection: IP66 (IP67 optional)



Zones 1&2; 21&22



EXPLOSION-PROOF CABLE GLANDS ARMORED DUAL SEAL



Cable wiring



Steel pipe wiring

DQM-II

- ◆ Ex d, Ex e structure.
- ◆ Dual seal, suitable for both armored and unarmored cable.
- ◆ EMC Cable Gland. (360° contact) - EMC tested.
- ◆ Provides a seal and an electrical bond on the cables lead inner sheath.

Explosion protection

Global (IECEx)
Ex d IIC Gb
Ex e IIC Gb
Ex tb IIIC Db IP66
Europe (ATEX)

Ex II 2 G Ex d IIC Gb
Ex II 2 G Ex e IIC Gb
Ex II 2 D Ex tb IIIC Db IP66

Certificates: IECEx; ATEX; CU-TR

Gland material:

Stainless steel or nickel plated brass

Connection thread: M20-M115
NPT1/2"-NPT4"
G1/2"-G4"

Degree of protection: IP66 (IP67 optional)



Zones 1&2; 21&22

EXPLOSION-PROOF CABLE GLANDS UNARMORED COMPOUND BARRIER



Cable wiring



Steel pipe wiring

DQM-III

- ◆ Ex d, Ex e structure.
- ◆ With sealing ring and sealing compound; suitable for unarmored cable.
- ◆ For particular use with: cables that exhibit "cold flow" characteristics.

Explosion protection

Global (IECEx)
Ex d IIC Gb
Ex e IIC Gb
Ex tb IIIC Db IP66
Europe (ATEX)

Ex II 2 G Ex d IIC Gb
Ex II 2 G Ex e IIC Gb
Ex II 2 D Ex tb IIIC Db IP66

Certificates: IECEx; ATEX; CU-TR

Gland material:

Stainless steel or nickel plated brass

Connection thread: M20-M115
NPT1/2"-NPT4"
G1/2"-G4"

Degree of protection: IP66 (IP67 optional)



Zones 1&2; 21&22

EXPLOSION-PROOF CABLE GLANDS ARMORED COMPOUND BARRIER



Cable wiring



Steel pipe wiring

DQM-III

- ◆ Ex d, Ex e structure.
- ◆ With sealing ring and sealing compound; suitable for armored cable.
- ◆ For particular use with: cables that exhibit "cold flow" characteristics.
- ◆ EMC Cable Gland. (360° contact) - EMC tested.

Explosion protection

Global (IECEx)
Ex d IIC Gb
Ex e IIC Gb
Ex tb IIIC Db IP66
Europe (ATEX)

Ex II 2 G Ex d IIC Gb
Ex II 2 G Ex e IIC Gb
Ex II 2 D Ex tb IIIC Db IP66

Certificates: IECEx; ATEX; CU-TR

Gland material:

Stainless steel or nickel plated brass

Connection thread: M20-M115
NPT1/2"-NPT4"
G1/2"-G4"

Degree of protection: IP66 (IP67 optional)



Zones 1&2; 21&22

EXPLOSION-PROOF CABLE GLANDS ARMORED DUAL SEAL



DQM-CF

- ◆ Ex d, Ex e structure.
- ◆ Dual seal, suitable for both armored and unarmored cable.
- ◆ EMC Cable Gland. (360° contact) - EMC tested.
- ◆ For particular use with: cables that exhibit "cold flow" characteristics.



Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex db IIC Gb (only for M and NPT thread)

Ex eb IIC Gb

Ex tb IIIC Db

Europe (ATEX)

Ex II 2 G Ex d IIC Gb (only for M and NPT thread)

Ex II 2 G Ex eb IIC Gb

Ex II 2 D Ex tb IIIC Db

Certificates: IECEx; ATEX

Gland material:

Stainless steel or nickel plated brass

Connection thread: M20-M63
NPT1/2"-NPT2"
G1/2"-G2"

Degree of protection: IP66

EXPLOSION-PROOF FLEXIBLE CONDUITS



BNG

- ◆ Ex d structure.
- ◆ Application:
 - Widely used for flexible connection between explosion-proof boxes or explosion-proof light fittings and pipes
 - Protect cable from any damage
 - Highly corrosion-proof



Zones 1&2; 21&22

Explosion protection

Global (IECEx)

Ex d IIC Gb

Ex tD A21 IP66

Europe (ATEX)

Ex II 2 G Ex d IIC Gb

Ex II 2 D Ex tD A21 IP66

Certificates: IECEx; ATEX; CU-TR

Material:

Stainless steel body; connectors at both ends in stainless steel

Type: F/F, M/F or M/M

Connection thread: M20-M63
NPT1/2"-NPT2"
G1/2"-G2"

Degree of protection: IP66

EXPLOSION-PROOF DRAIN PLUG

BPS(H)



Explosion protection:

Global (IECEx)

Ex db IIC T6/T5/96°C (T4) Gb

Ex tb IIIC T80°C/T95°C/T130°C Db

Ex eb IIC T6...T4 Gb

Ex tb IIIC T80°C/T95°C/T130°C Db

Europe (ATEX)

Ex II 2 G Ex d IIC Gb

Certificates: ATEX; IECEx

Material: SS316

Specification: M20x1.5





STOPPING PLUG	BPT-e	Explosion protection: Global (IECEx) Ex e IIC Gb Ex tb IIIC Db IP66 Europe (ATEX)  II 2 G Ex eb IIC Gb  II 2 D Ex tb IIIC Db Certificates: ATEX; IECEx Material: PA66(Polyamide) Specification: M16-M63
    	Zones 1&2; 21&22	

STOPPING PLUG	BPT <ul style="list-style-type: none">◆ Metric thread is standard type.◆ G thread or NPT thread is optional.◆ To be used at spare entries of explosion-proof equipment. corrosion-proof and waterproof.◆ Supplied with seal gasket (not applicable for NPT thread).	Explosion protection: Global (IECEx) Ex db IIC Gb Ex e IIC Gb Ex tb IIIC Db IP66 Europe (ATEX)  II 2 G Ex db IIC Gb  II 2 G Ex e IIC Gb  II 2 D Ex tb IIIC Db IP66 Certificates: IECEx; ATEX; CU-TR Material: copper-free aluminium alloy, galvanized carbon steel, nickel plated brass or stainless steel Specification: M20-M115 INPT1/2"-NPT4" IG1/2"-G4"
    	Zones 1&2; 21&22	

EX e STOPPING ROD	LOCKNUT	SERRATED WASHER
		

Material: Plastic
Specification: $\phi 8$, $\phi 12$, $\phi 23$, $\phi 32$

Material: Galvanized carbon steel, nickel plated brass or stainless steel.
Specification: M20-M115
G1/2"-G4"

Material: Stainless steel
Specification: M20-M75

SEALING WASHER	SHROUD	EARTH LUG
		

Material: Teflon(PTFE)
Specification: M20-M115

Material: Polyvinyl chloride (PVC)
Size Code: A-J

Material: Nickel plated brass
Specification: $\phi 20$ - $\phi 115$